

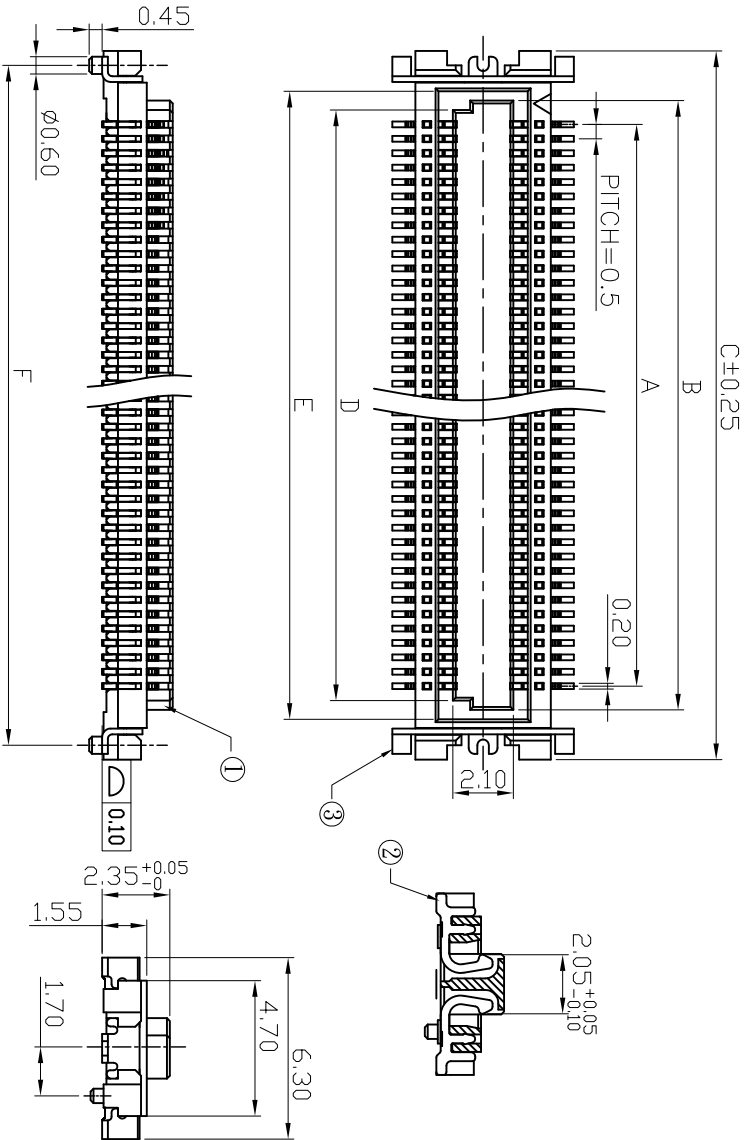


REV.	DESCRIPTION	DATE
A	最新料號版	2012/01/13

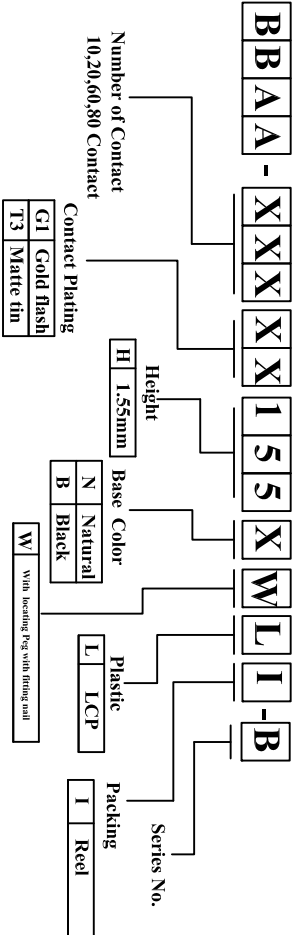

L/TR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds, Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V AC/Min

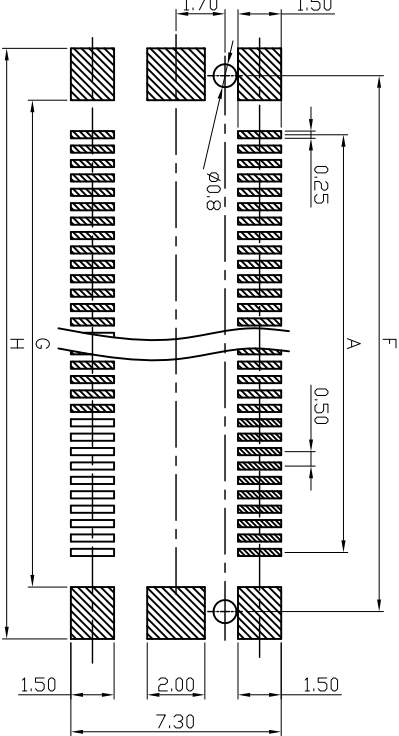

Circuit No.	Dimensions							
	A	B (4+1.55)	C (4+5.1)	D (4+1.0)	E (4+2.3)	F (4+4.1)	G (4+2.4)	H (4+6.0)
2*5P	2.00	3.65	7.10	3.00	4.30	6.10	4.40	8.00
2*10P	4.50	6.15	9.60	5.50	6.80	8.60	6.90	10.50
2*30P	14.50	16.15	19.60	15.50	16.80	18.60	16.90	20.50
2*40P	19.50	21.15	24.60	20.50	21.80	23.60	21.90	25.50

竣豪電子股份有限公司 <i>Superior Tech Co., Ltd.</i>				General Tolerance			
X. ± 0.5		DRAWN		TITLE		PH0.5 BT0B H1.55 公座成品	
.X ± 0.3		張紅蘭		DATE		2012/01/13	
.XX ± 0.2		CHECK		DATE		2012/01/13	
.XXX ± 0.1		APPROVED		DATE		2012/01/13	
± 5°		角度		PART NO.		BBA-XXXXXX155XWLI-B	
SCALE 1:1		UNIT mm		CUSTOMER NO.			
REV. A		SCALE 1:1		UNIT mm		CUSTOMER NO.	