



REV.	DESCRIPTION	DATE
A	New Drawing	2017/11/16

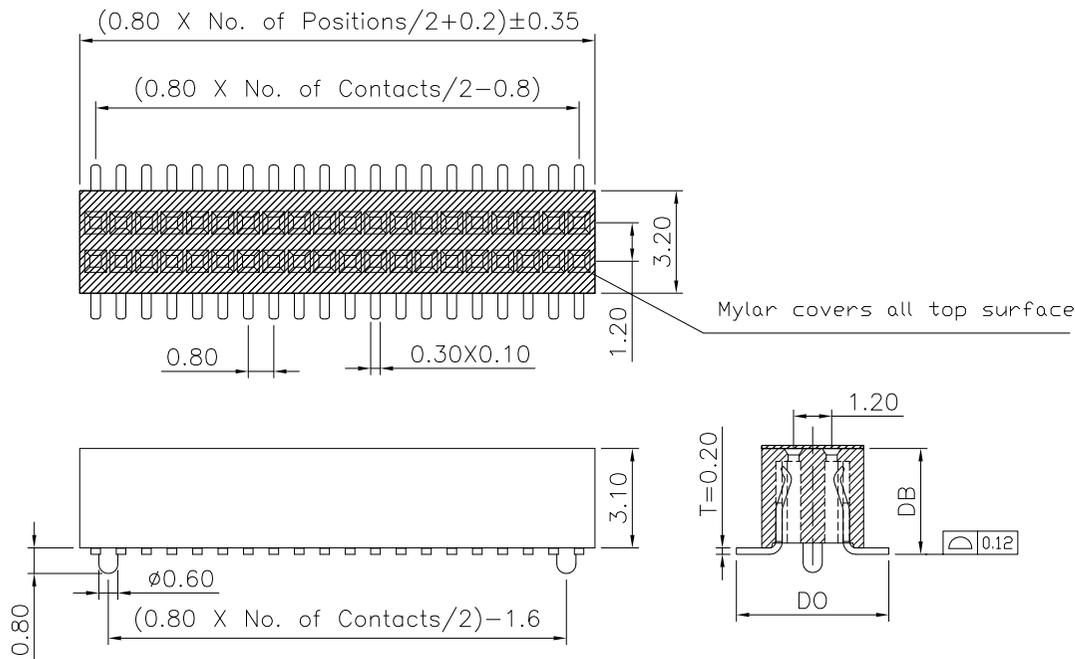

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T LCP UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
2	Mylar	Polyimide Tape	250°C-SHORT TERM	1


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min .

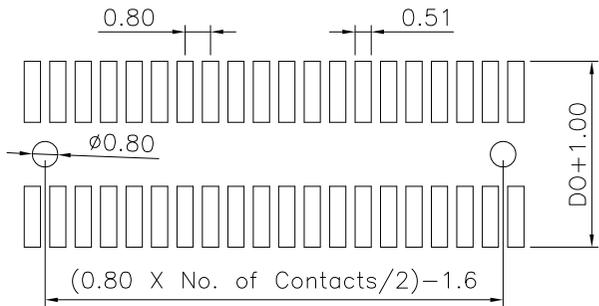

P.C.B LAYOUT

RoHS compliant

FHAD-S S XXXX G1 N B W X - X

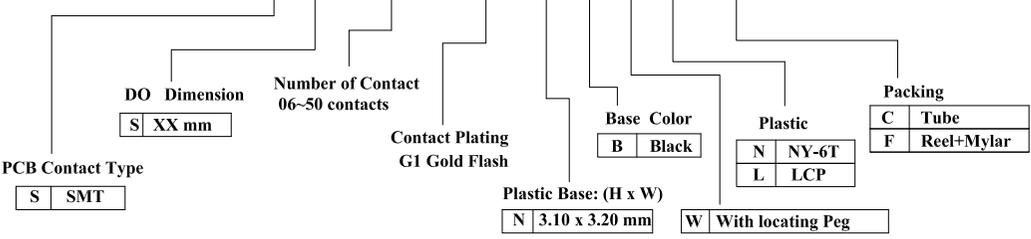

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		0.8x1.2mm Female Header Dual Row SMT Type	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Tom		10-30-23'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°				NO. T220	
				PART NO. FHAD-SSXXXG1NBWX-X	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	