
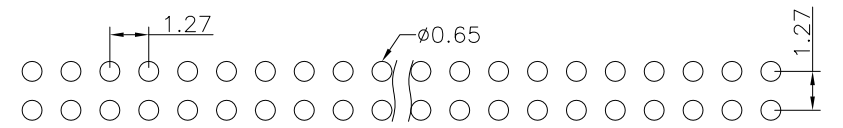


REV.	DESCRIPTION	DATE
A	New Drawing	2015/10/26

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XXX

Normal Force : 60 Grams Average .  
Temperature Rating : -40°C ~ +105°C .  
Dielectric Withstanding Voltage : 500V AC/Min .

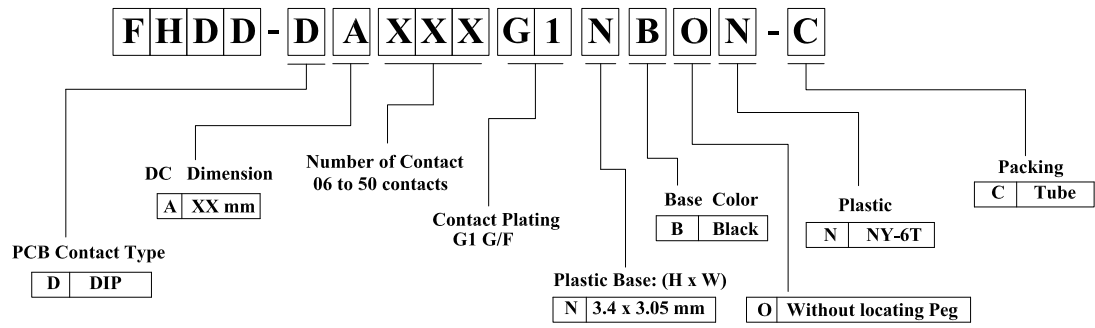

**P.C.B LAYOUT**

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE		Pitch 1.27x1.27mm Female Header ,Straight Dual Row	
X. ± 0.5		DRAWN	DATE	NO.	
.X ± 0.3		Xialiangjian	10-26-15'	002	
.XX ± 0.2		CHECK	DATE	PART NO.	
.XXX ± 0.1		APPROVED	DATE	FHDD-DAXXXG1NBON-C	
角度	± 5°			CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	4:1	