


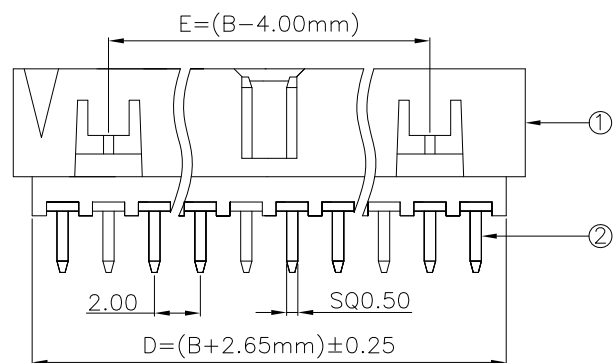


| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | New Drawing | 2009/09/14 |

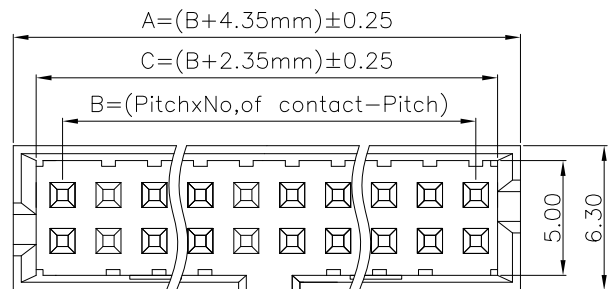


| LTR | Part Name | Material | Description | QTY |
|-----|-----------|------------------|--|-----|
| 1 | Housing | Nylon UL94V-0 | 260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min. | 1 |
| 2 | Contact | Brass | Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max. | XX |

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min

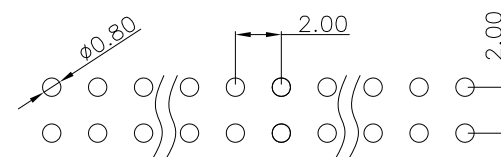

P.C.B LAYOUT

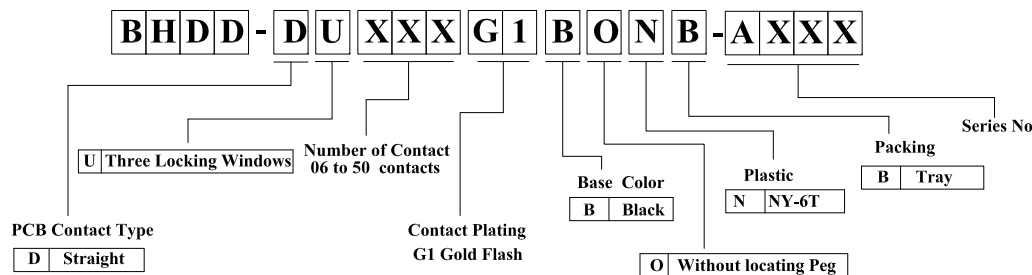

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

TITLE

2.0 Shrouded Header Dual Row Straight

X. ± 0.5

DRAWN
ZhaoXiaoLin

DATE
09-14-09'

NO.
002

.X ± 0.3

CHECK
XiaoPing

DATE
09-14-09'

PART NO.
BHDD-DUXXXG1BONB-AXXX

.XX ± 0.2

APPROVED
JOHN

DATE
09-14-09'

CUSTOMER NO.

REV.


A

UNIT

mm

SCALE

1:1



.XXX ± 0.1

角度 ± 5°

(Q2-R03-01A) ST-R05-07