


REV.	DESCRIPTION	DATE
A	New Drawing	2013/07/12


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94-V0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
 Dielectric Withstanding Voltage : 1000V AC/Min

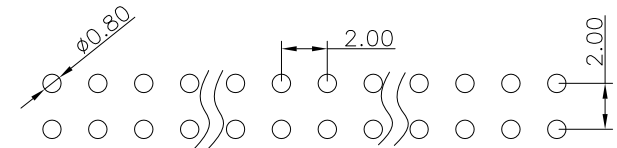

P.C.B LAYOUT

BHDD - R U X X X G 1 B O N B - C X X X

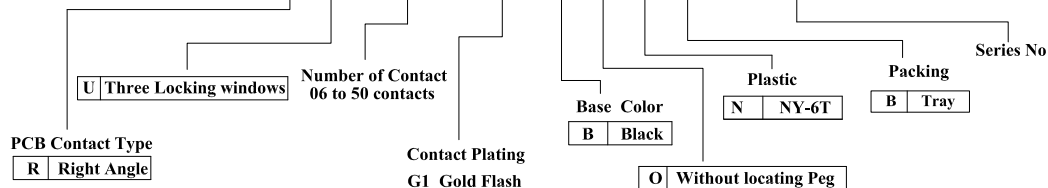

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	2.0x2.0mm Shrouded Header	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Zhanghonglan	07-12-13'	002
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	APPROVED	DATE	BHDD-RUXXXG1BONB-CXXX
角度	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07