

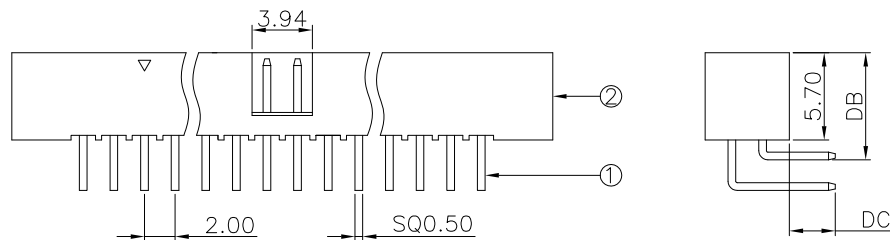


REV.	DESCRIPTION	DATE
A	New Drawing	2007/08/04

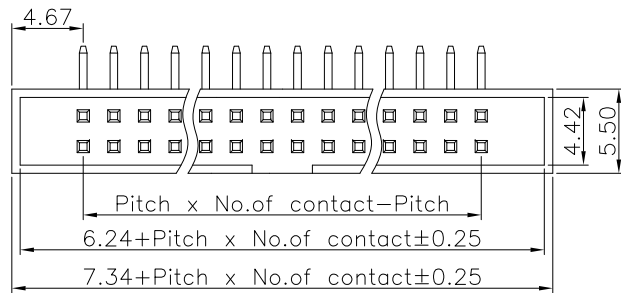

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94-V0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX


Temperature Rating : -40°C ~ +105°C .  
Dielectric Withstanding Voltage : 1000V AC/Min

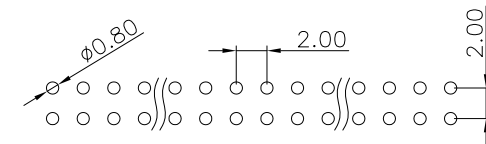

**P.C.B LAYOUT**

RoHS compliant

**B H C D - R C X X X G 1 B O N B - C X X X**

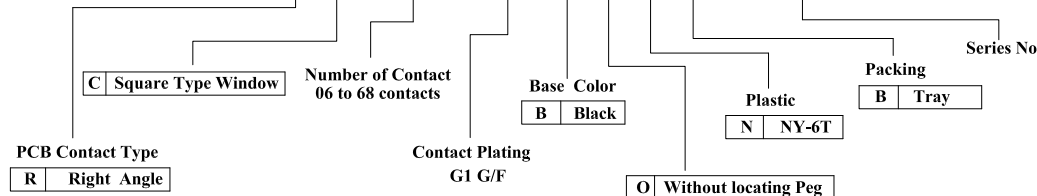

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE	2.0 Shrouded Header Dual Row	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Fuqianshan	08-04-07'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Fuqianshan	08-04-07'	BHCD-RCXXXG1BONB-CXXX
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.
		Jhen-fa	08-04-07'	

REV.	UNIT	SCALE
A	mm	1:1

