


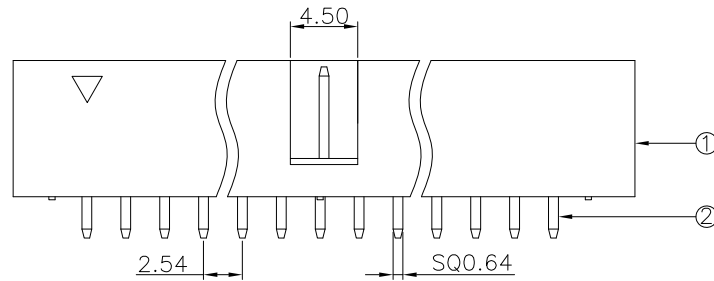


REV.	DESCRIPTION	DATE
A	New Drawing	2022/02/09

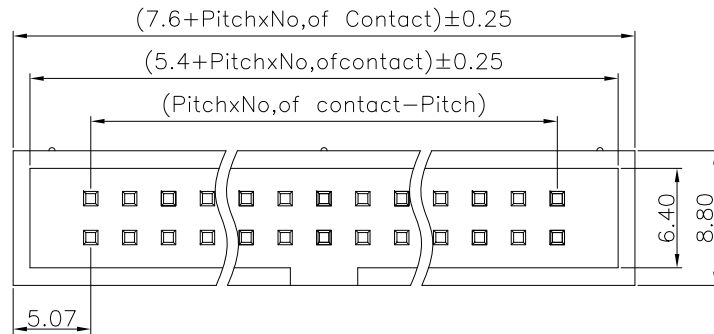


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min

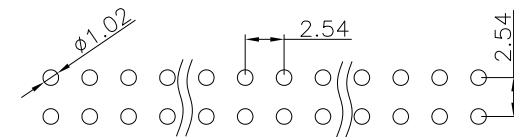

P.C.B LAYOUT

RoHS compliant

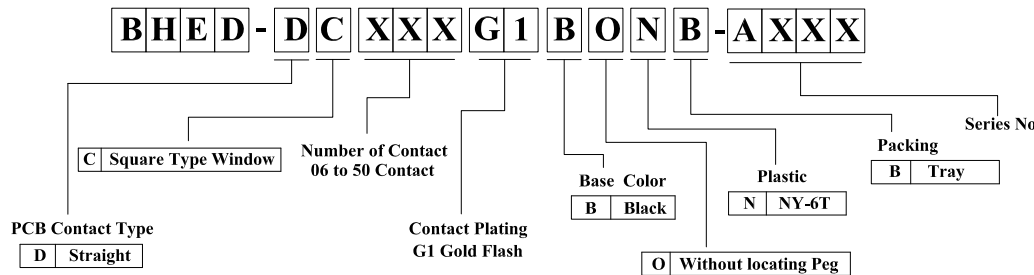

竣豪電子股份有限公司 Superior Tech Co., Ltd.		General Tolerance		TITLE		2.54 Shrouded Header Dual Row Straight	
		X. ± 0.5		DRAWN		DATE	
REV. A		UNIT mm		Jacky		NO. 002	
SCALE 2:1		.X ± 0.3		CHECK		DATE	
		.XX ± 0.2		Tom		PART NO.	
		.XXX ± 0.1		APPROVED		DATE	
		角度 ± 5°		Tom		CUSTOMER NO.	
						02-09-22'	