

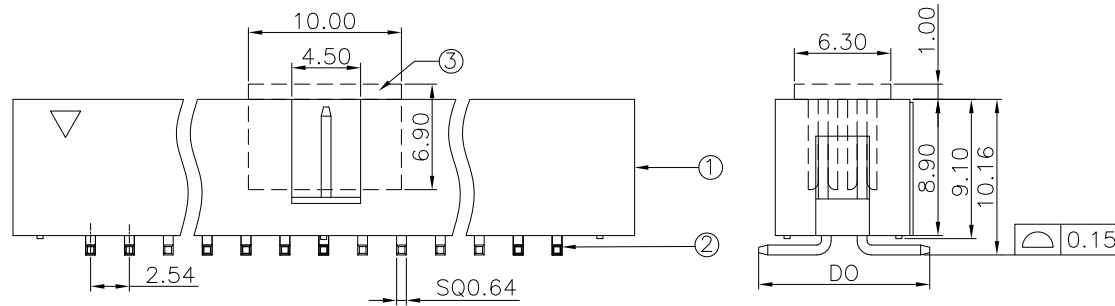


REV.	DESCRIPTION	DATE
A	New Drawing	2016/02/21

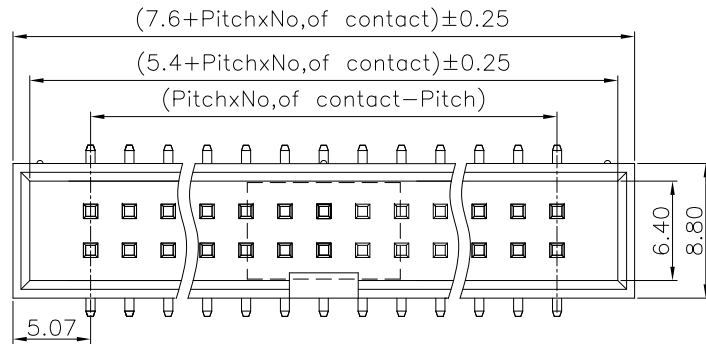

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon UL94V-0	260°C for 10 Seconds .	1


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min

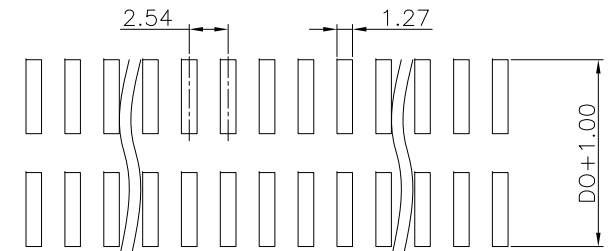

P.C.B LAYOUT

RoHS compliant

B H E D - S C X X X G 1 B O N X - B X X X

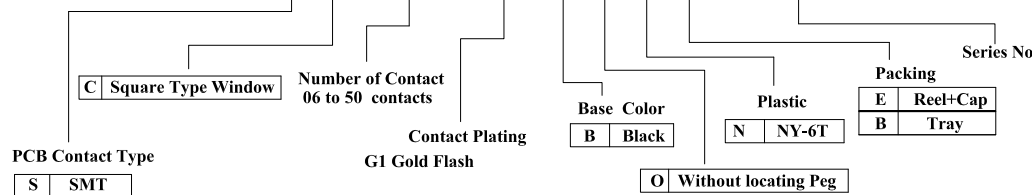

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		2.54 x 2.54 Shrouded Header, SMT Dual Row	
X. ± 0.5		DRAWN	DATE	NO.	
.X ± 0.3		Zhanghonglan	02-21-16'	002	
.XX ± 0.2		CHECK	DATE	PART NO.	
.XXX ± 0.1		APPROVED	DATE	BHED-SCXXXG1BONX-BXXX	
角度	± 5°			CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07