

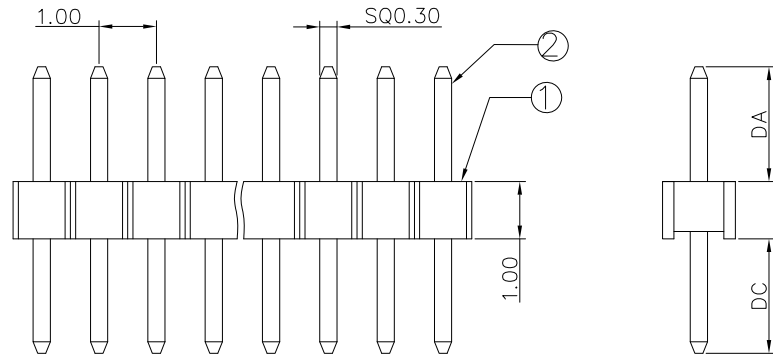


REV.	DESCRIPTION	DATE
A	New Drawing	2015/06/12

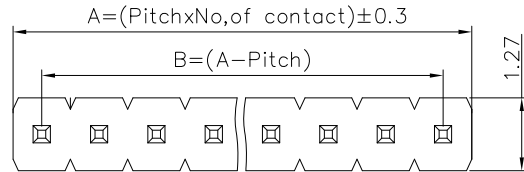


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 500V AC/Min



### P.C.B LAYOUT

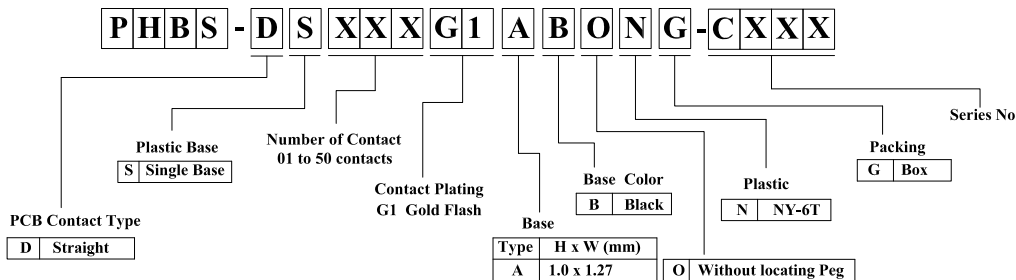

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance TITLE 1.0 Pin Header Single Row, Double Plastic DIP Type Base

X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Zhanghonglan	06-12-15'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	PHBS-DSXXXG1ABONG-CXXX
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07