


REV.	DESCRIPTION	DATE
A	New Drawing	2015/12/11


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 0.75A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

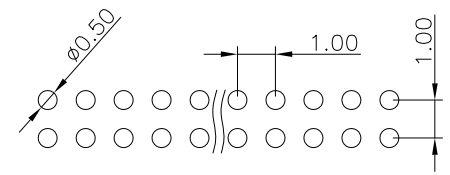

P.C.B LAYOUT

PHBD - DD XXX G1 A B O N G - AXXX

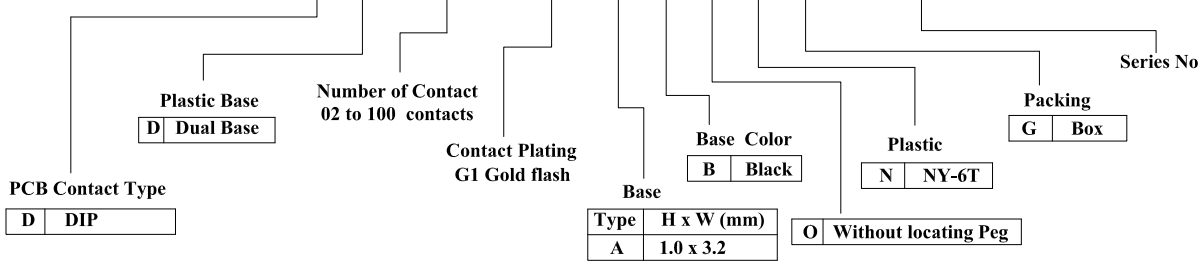

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		1.0x1.0mm Pin Header 180° Dual Row	
X. ± 0.5		DRAWN 張智華	DATE	NO.	
.X ± 0.3			12-11-15'	002	
.XX ± 0.2		CHECK	DATE	PART NO.	
.XXX ± 0.1		APPROVED	DATE	PHBD-DDXXXG1ABONG-AXXX	
角度 ± 5°				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	