



REV.	DESCRIPTION	DATE
A	New Drawing	2023/01/17

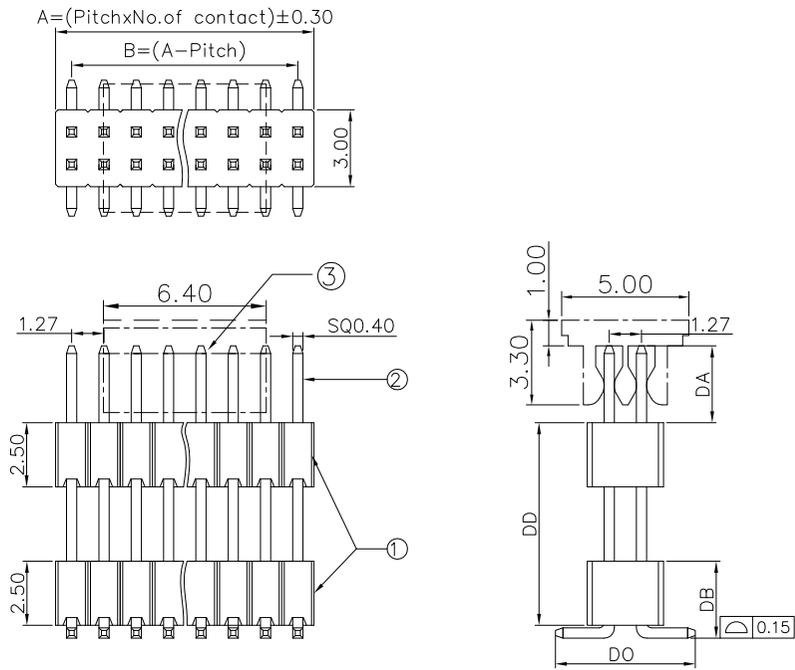

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	CAP	Nylon UL94V-0	260°C for 10 Seconds .	1


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

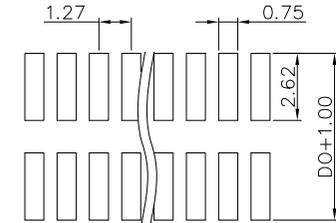

P.C.B LAYOUT

RoHS compliant

PHCD-S D XXX G1 A B O N X - B XXX

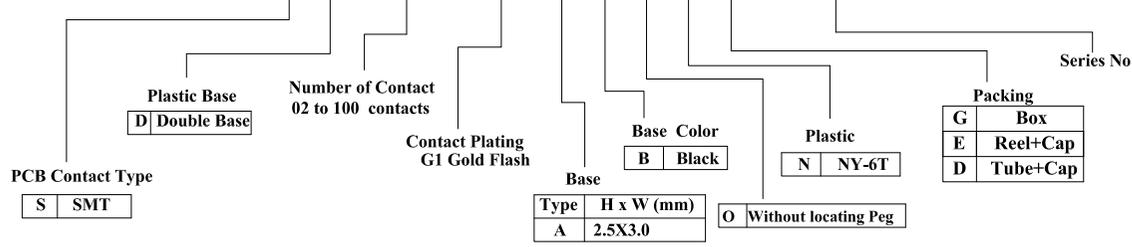

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	1.27x1.27mm Pin Header Dual Row, SMT	
X. ± 0.5		DRAWN	Jacky	DATE 01-17-23'
.X ± 0.3		CHECK	Tom	DATE 01-17-23'
.XX ± 0.2		APPROVED	Tom	DATE 01-17-23'
.XXX ± 0.1				
角度 ± 5°				
		NO.	002	
		PART NO.	PHCD-SDXXXG1ABONX-BXXX	
		CUSTOMER NO.		

REV.	UNIT	SCALE	
A	mm	1:1	