

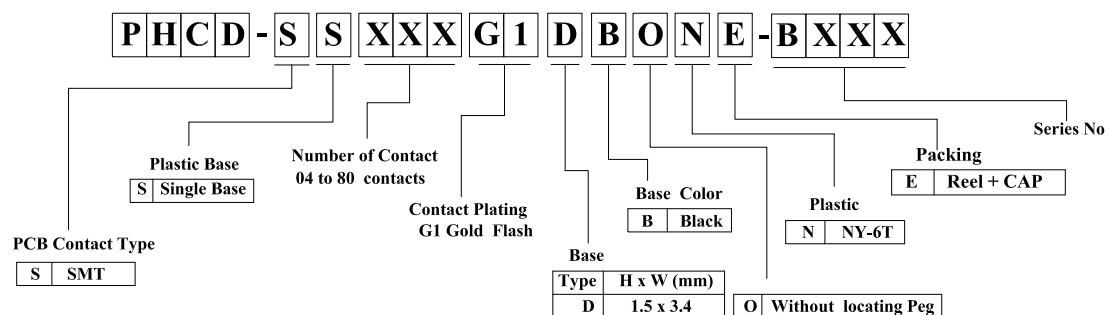
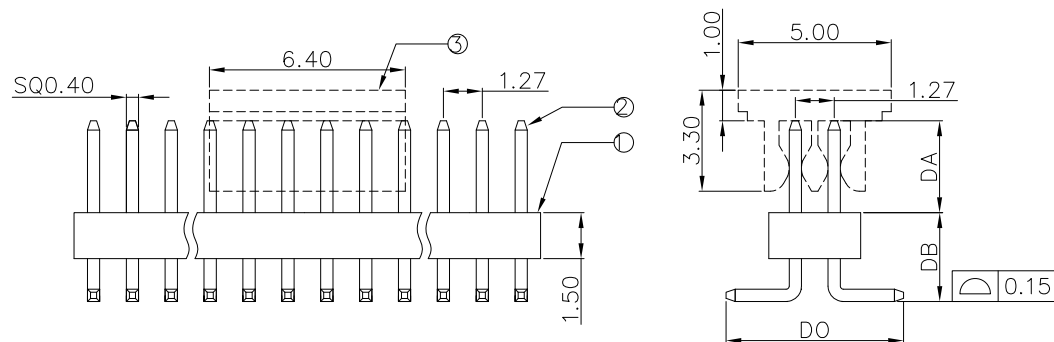


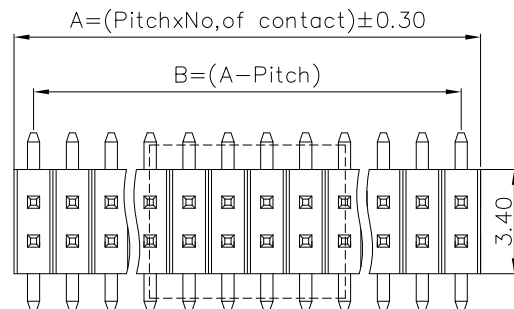

REV.	DESCRIPTION	DATE
A	New Drawing	2021/04/26

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon UL94V-0	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

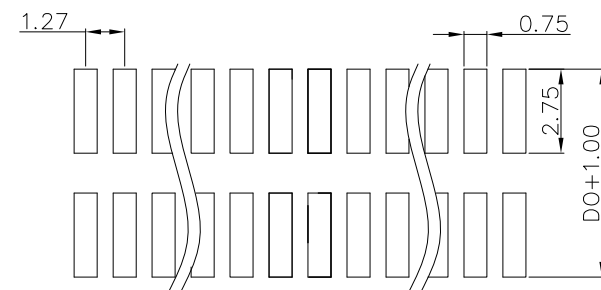

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	4:1	

General Tolerance	TITLE	1.27x1.27mm SMT Pin Header Dual Row
X. ± 0.5	DRAWN	DATE
.X ± 0.3	Tom	NO.
.XX ± 0.2	CHECK	DATE
.XXX ± 0.1	APPROVED	PART NO.
角度 ± 5°		DATE
		CUSTOMER NO.

(Q2-R03-01A) ST-R05-07