



REV.	DESCRIPTION	DATE
A	New Drawing	2016/05/17

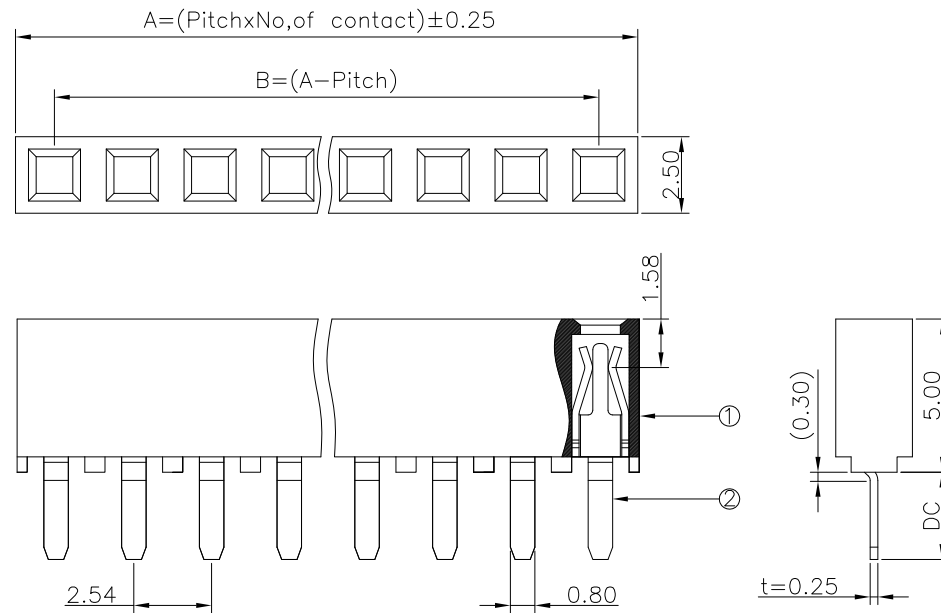


LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Normal Force : 125 Grams Average .  
Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 1000V AC/Min .

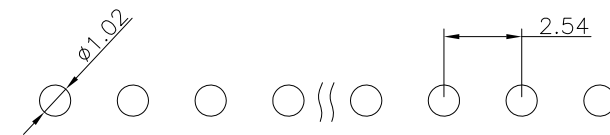

### P.C.B LAYOUT

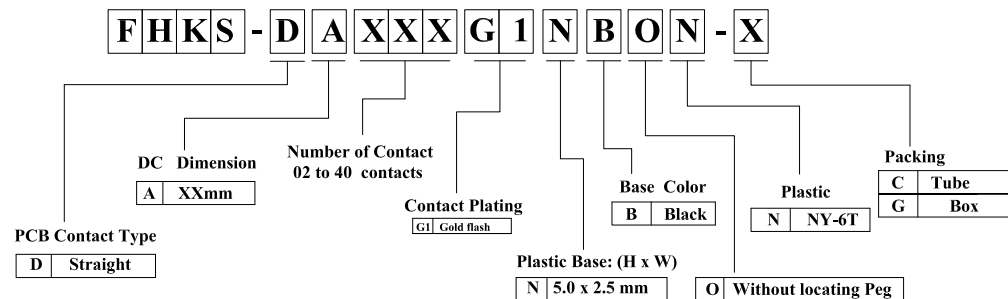

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE		Pitch 2.54mm Female Header ,Straight Single Row	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		張智華		05-17-16'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°				NO. T096	
				PART NO. FHKS-DAXXXG1NBON-C	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	4:1	