

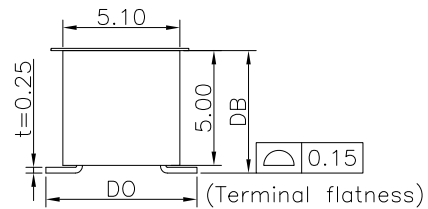


REV.	DESCRIPTION	DATE
A	New Drawing	2017/12/27

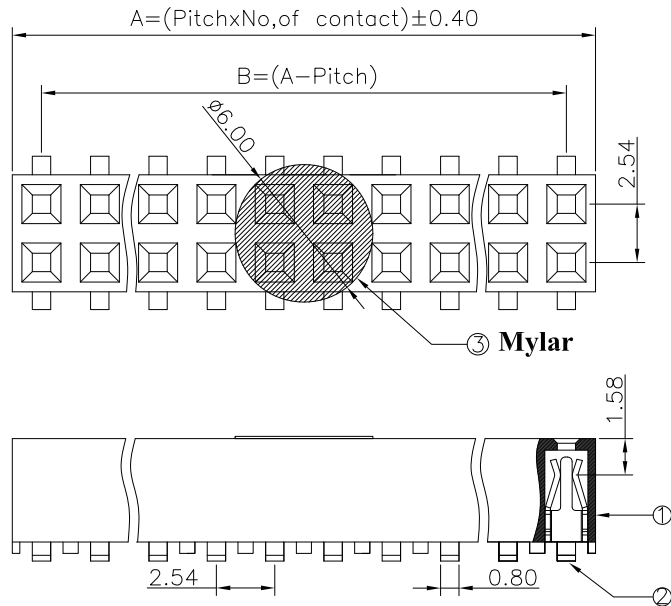

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	Polyimide Tape	250°C-SHORT TERM	1


Normal Force : 125 Grams Average .
Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min .

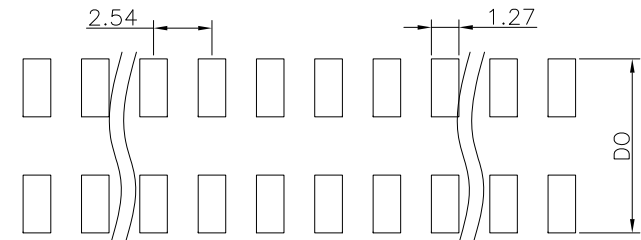

P.C.B LAYOUT

RoHS compliant

FHKD-S S XXX G1 N B O N - X

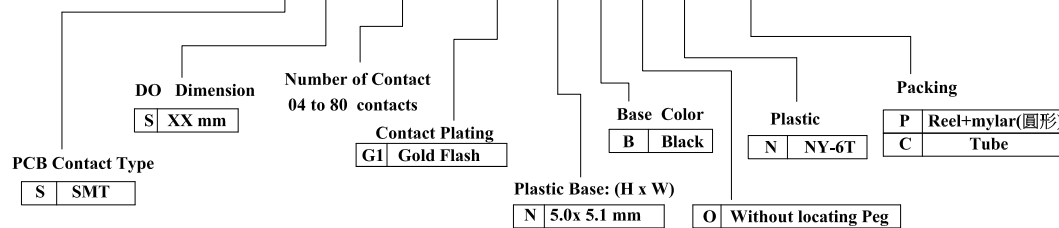

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	2.54mm Female Header, SMT Dual Row	
X. ± 0.5	DRAWN Tom	DATE	NO.
.X ± 0.3		12-27-17'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	FHKD-SSXXXG1NBON-X
角度 ± 5°		DATE	CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	