

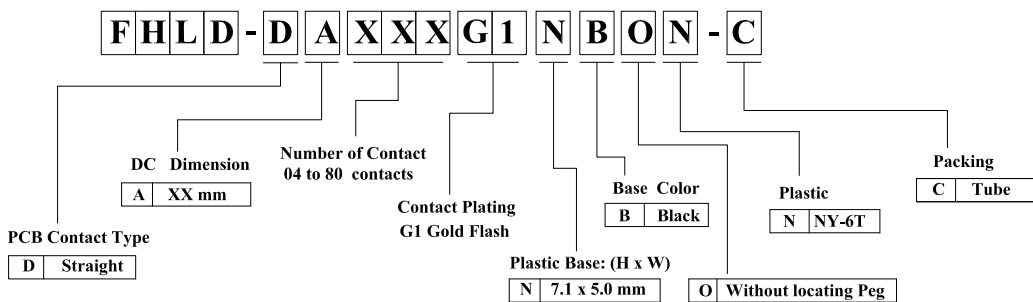


REV.	DESCRIPTION	DATE
A	New Drawing	2014/12/09

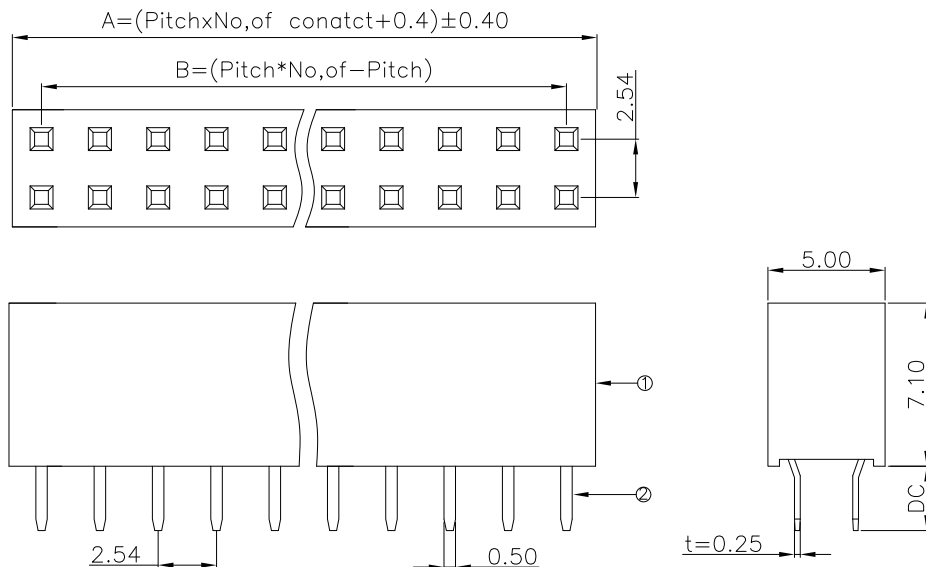

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min .

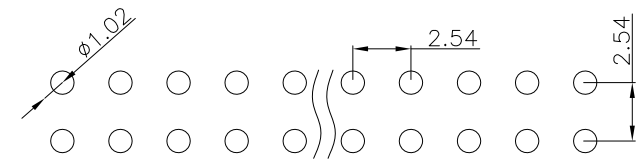

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		2.54x2.54mm Female Header Dual Row DIP Type	
X. ± 0.5		DRAWN	劉新遠	DATE	NO.
.X ± 0.3				12-09-14'	002
.XX ± 0.2		CHECK	張紅蘭	DATE	PART NO.
.XXX ± 0.1				12-09-14'	FHL D-D A XXXX G1 N B O N - C
角度	± 5°	APPROVED	苟小平	DATE	CUSTOMER NO.
				12-09-14'	

REV.	UNIT	SCALE	
A	mm	3:1	