

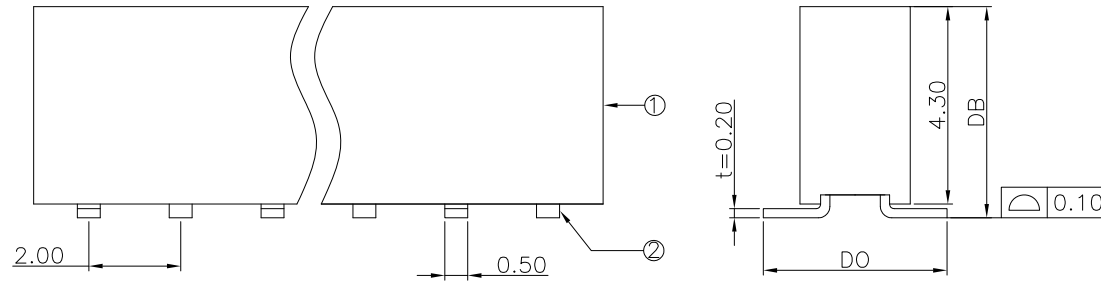


REV.	DESCRIPTION	DATE
A	New Drawing	2009/05/20

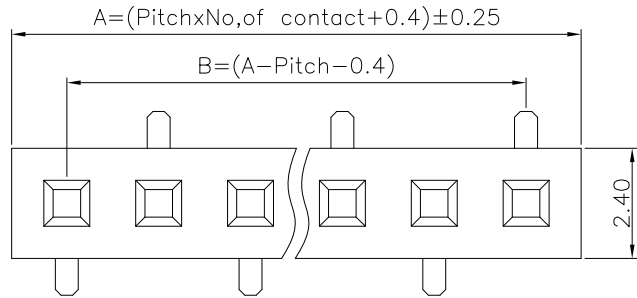


LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Normal Force : 60 Grams Average .
Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min .

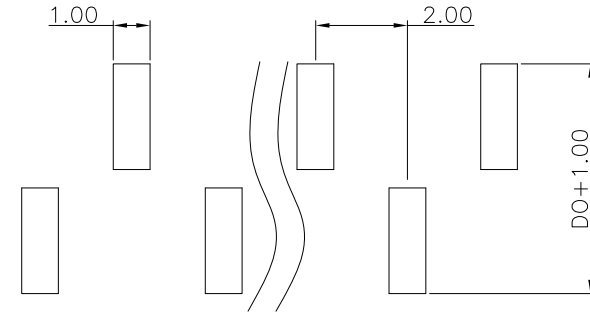

P.C.B LAYOUT

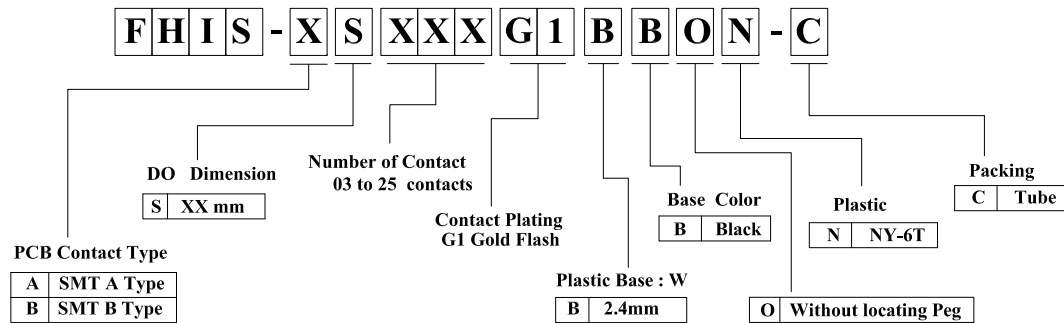

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		2.0mm Female Header Single Row , SMT A Type	
X. ± 0.5		DRAWN		DATE	NO.
.X ± 0.3		ZhaoXiaoLin		05-20-09'	002
.XX ± 0.2		CHECK		DATE	PART NO.
.XXX ± 0.1		APPROVED		DATE	FHIS-XXSXXXG1BBON-C
角度	± 5°				CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	6:1	