


REV.	DESCRIPTION	DATE
A	New Drawing	2014/04/15

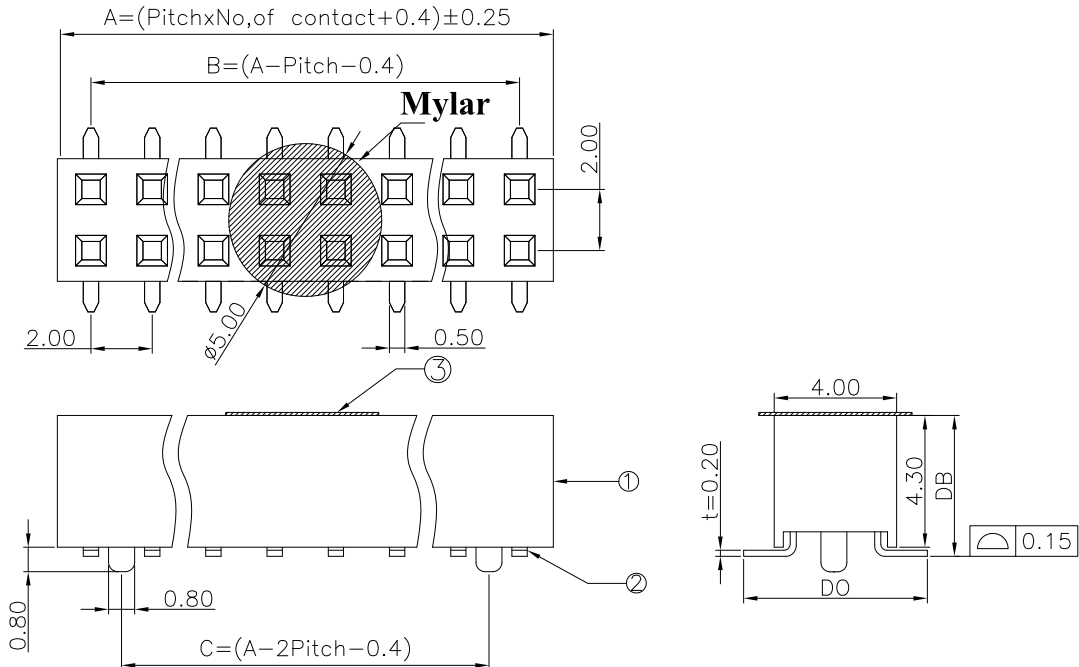


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	Polyimide Tape	250°C-SHORT TERM	1

Normal Force : 60 Grams Average .  
Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 1000V AC/Min .

**F H I D - S S X X X G 1 A B X N - X**

- PCB Contact Type: **S** SMT
- DO Dimension: **S** XX mm
- Number of Contact: 06 to 80 contacts
- Contact Plating: **G1** Gold Flash
- Base Color: **B** Black
- Plastic Base: (H x W) **A** 4.3\*4.0 mm
- Plastic: **N** NY-6T
- Packing: **P** Reel+ Round Mylar, **C** Tube
- Without locating Peg: **O**
- With locating Peg: **W**

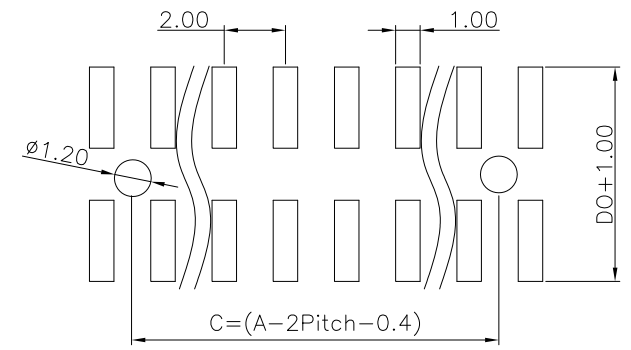

**P.C.B LAYOUT**

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	2.0x2.0mm Female Header Dual Row SMT Type		
X. ± 0.5	DRAWN	DATE	NO.	
.X ± 0.3	劉新遠	04-15-14'	002	
.XX ± 0.2	CHECK	DATE	PART NO.	
.XXX ± 0.1	APPROVED	DATE	FHID-SSXXXG1ABXN-X	
角度 ± 5°			CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	4:1	