
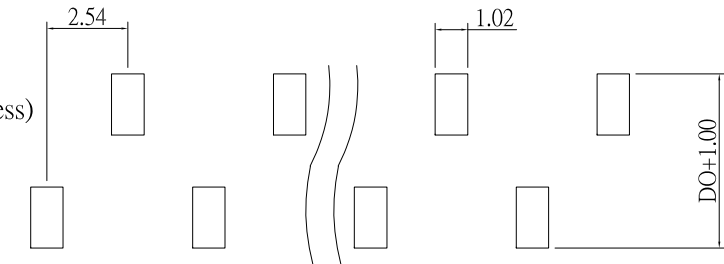
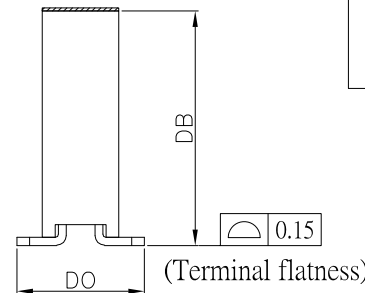
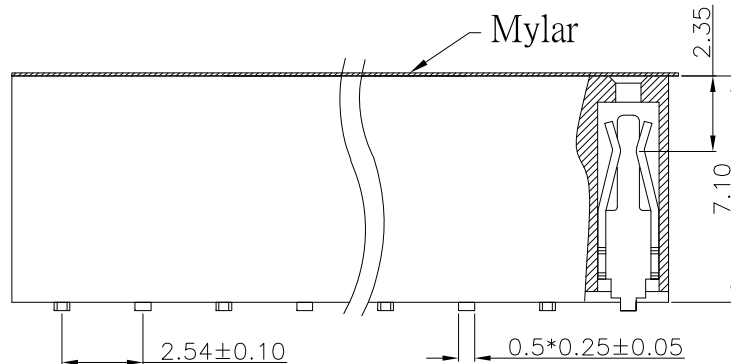



REV.	DESCRIPTION	DATE
A	New Drawing	2015/08/03

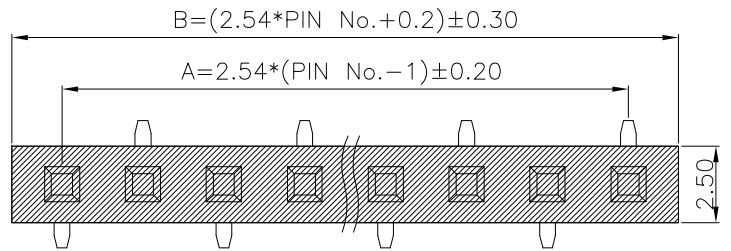

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	PI	250°C for 10 Seconds .	1

Normal Force : 125 Grams Average .
Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 1000V AC/Min .

P.C.B LAYOUT

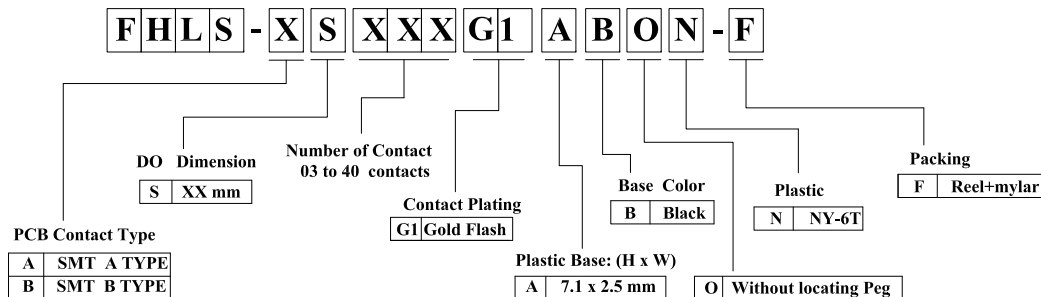

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE 2.54mm Female Header SMT	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Zhanghonglan	08-03-15'	T169
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	FHLS-XSXXXG1ABON-F
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1

