

P.C.B LAYOUT


RoHS compliant

REV.	DESCRIPTION	DATE
A	New Drawing	2023/02/10

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

PHCD - R S XXX G1 D B O N G - C X X X X

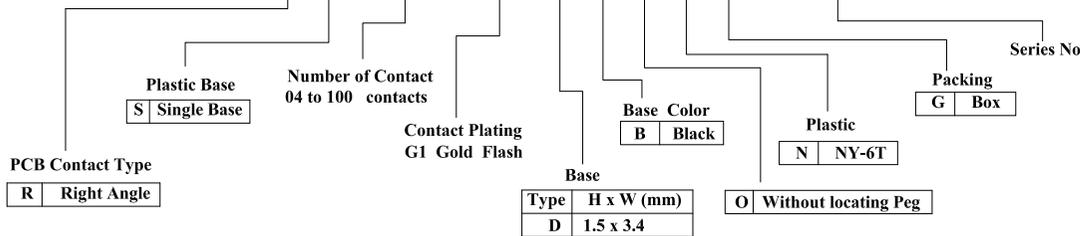

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	1.27x1.27 Pin Header, Right Angle Dual Row	
X. ± 0.5	DRAWN Jacky	DATE	NO.
.X ± 0.3		02-10-23'	002
.XX ± 0.2	CHECK Tom	DATE	PART NO.
.XXX ± 0.1		02-10-23'	PHCD-RSXXXG1DBONG-CXXXX
角度 ± 5°	APPROVED Tom	DATE	CUSTOMER NO.
		02-10-23'	

REV.	UNIT	SCALE	
A	mm	1:1	