

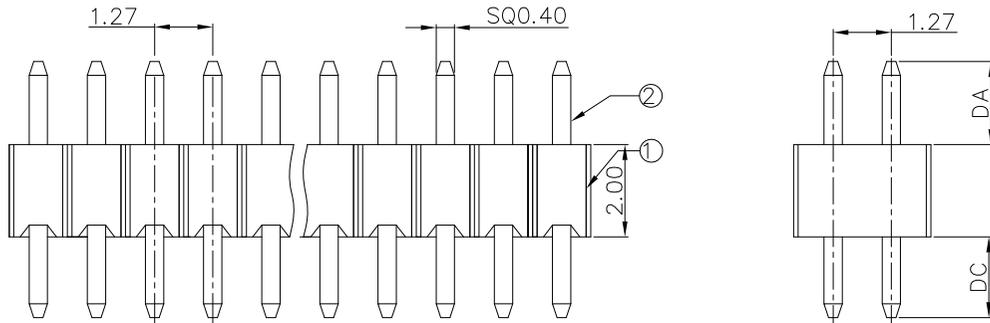


REV.	DESCRIPTION	DATE
A	New Drawing	2023/01/03

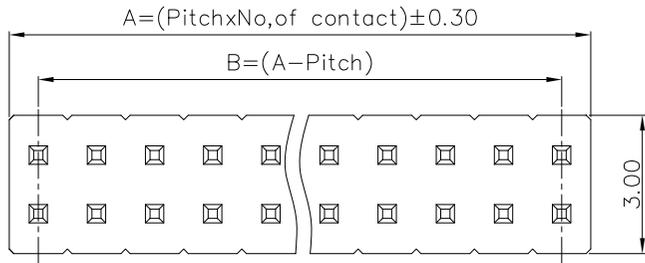


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

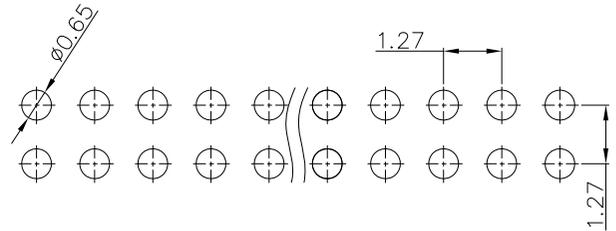

P.C.B LAYOUT

PHCD-D S XXXX G1 I B O N X - A XXXX

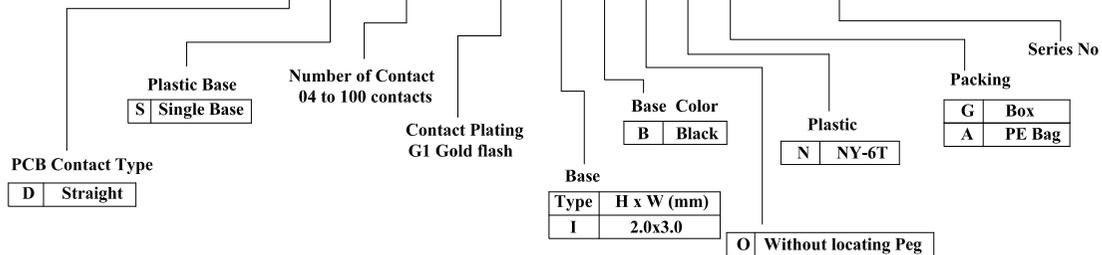

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	1.27x1.27mm Pin Header Dual Row	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Tom	01-03-23'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	PHCD-DSXXXG1IBONX-AXXX
角度 ± 5°				CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1

