

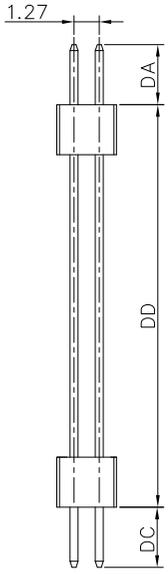
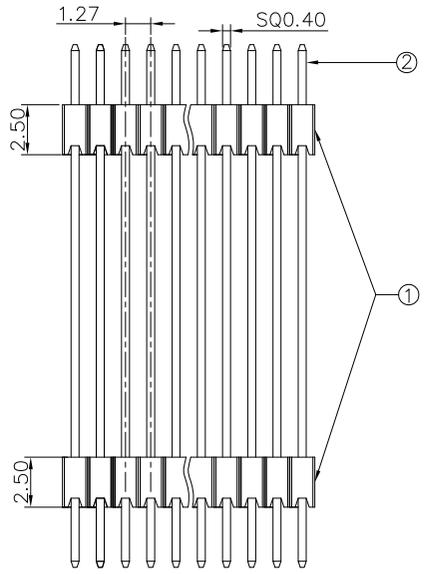


REV.	DESCRIPTION	DATE
A	New Drawing	2023/03/24




LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min



P.C.B LAYOUT

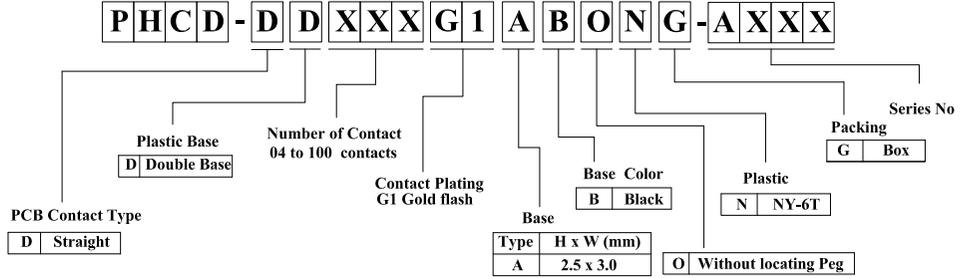

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	1.27x1.27mm Pin Header Dual Row	
X. ± 0.5		DRAWN	Tom	DATE 03-24-23'
.X ± 0.3		CHECK		NO. 002
.XX ± 0.2		APPROVED		PART NO. PHCD-DDXXXG1ABONG-AXXX
.XXX ± 0.1				CUSTOMER NO.
角度	± 5°			

REV.	UNIT	SCALE	
A	mm	1:1	