

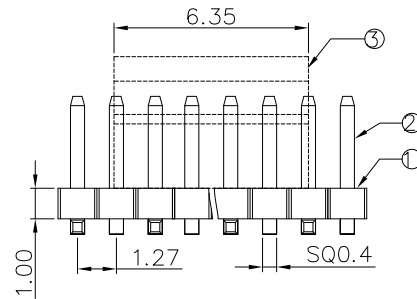


REV.	DESCRIPTION	DATE
A	New Drawing	2021/07/31


$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.3$$

$$B = (A - \text{Pitch})$$

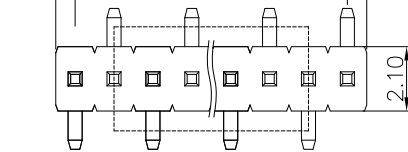

PCB Contact Type		Plastic Base		Number of Contact		Contact Plating		Base Color		Plastic		Packing		Series No	
A	SMT A Type	S	Single Base	03-25	contacts	G1	Gold Flash	B	Black	N	NY-6T	C	Tube	0	Without locating Peg
Base		Type		H x W (mm)											
C				1.0 x 2.1											

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon UL94V-0	260°C for 10 Seconds .	1
Temperature Rating : -40°C ~ +105°C . Dielectric Withstanding Voltage : 500V AC/Min				

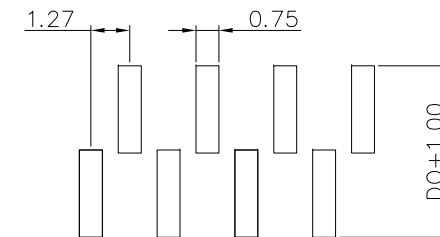


P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE
A	mm	4:1



General Tolerance		TITLE	1.27x1.27mm Pin Header , SMT Single Row	
X. ± 0.5		DRAWN Tom	DATE	NO.
.X ± 0.3			07-31-21'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1				PHCS-ASXXXG1CBONX-BXXX
角度	± 5°	APPROVED	DATE	CUSTOMER NO.

(Q2-R03-01A) ST-R05-07