

P H E D - H S X X X G 1 A B O N X - B X X X

Series No

Plastic Base
S Single Base

Number of Contact
 04 to 80 contacts

PCB Contact Type
H Horizontal SMT

Contact Plating
G1 Glod flash

Base Color
B Black

Plastic
N NY-6T

Packing
F Reel +Mylar
I Reel


Base
 Type H x W (mm)
A 2.5 x 5.0

O Without locating Peg

REV.	DESCRIPTION	DATE
A	New Drawing	2019/01/15

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Mylar	Polyimide Tape	250°C-SHORT TERM	1

Temperature Rating : -40°C ~ +125°C .
 Dielectric Withstanding Voltage : 1000V AC/Min

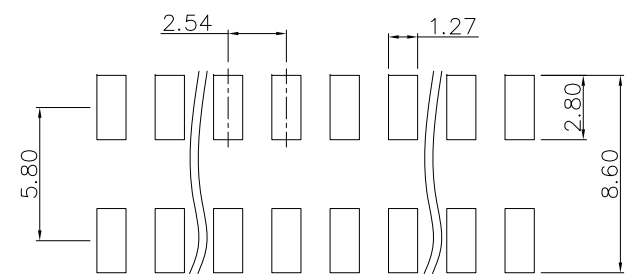

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	Pitch 2.54x2.54mm Pin Header Horizontal SMT Dual Rows	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Tom	01-15-19'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	PHED-HSXXXG1ABONX-BXXX
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	