


REV.	DESCRIPTION	DATE
A	New Drawing	2023/03/31

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon UL94V-0	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .  
Dielectric Withstanding Voltage : 1000V AC/Min

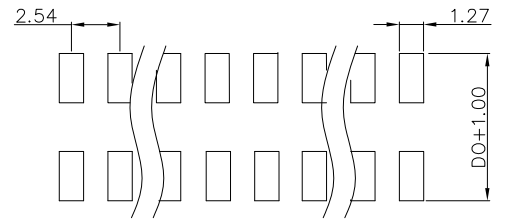

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE		Pitch 2.54x2.54mm Pin Header SMT Dual Row	
X. ± 0.5		DRAWN	Jacky	DATE	NO.
.X ± 0.3		CHECK	Tom	03-31-23'	002
.XX ± 0.2		APPROVED	Tom	DATE	PART NO.
.XXX ± 0.1				03-31-23'	PHED-SDXXXG1ABONX-BXXX
角度 ± 5°				DATE	CUSTOMER NO.
				03-31-23'	

REV.	UNIT	SCALE	
A	mm	1:1	