




REV.	DESCRIPTION	DATE
A	New Drawing	2022/10/12

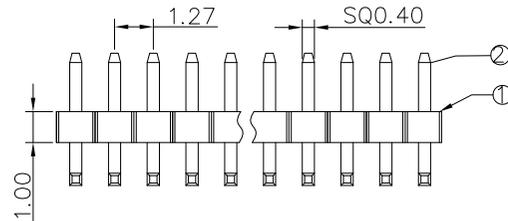


LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

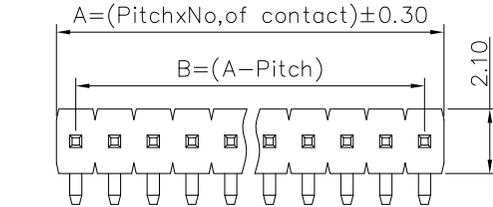

P.C.B LAYOUT

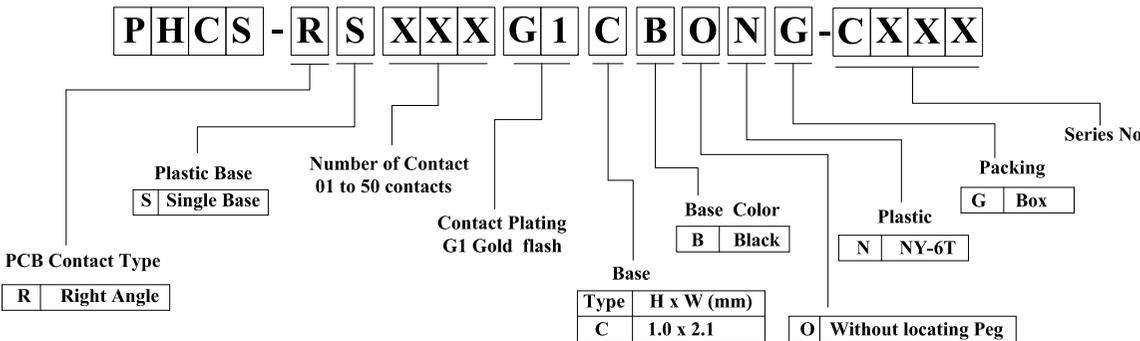

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

TITLE

1.27 Pin Header Right Angel Single Row

X. ± 0.5

DRAWN

Jacky

DATE

10-12-22'

NO.

002

.X ± 0.3

CHECK

Tom

DATE

10-12-22'

PART NO.

PHCS-RSXXXG1CBONG-CXXX

.XX ± 0.2

APPROVED

Tom

DATE

10-12-22'

CUSTOMER NO.

REV.


A

UNIT

mm

SCALE

1:1



角度

± 5°

APPROVED

Tom

DATE

10-12-22'

(Q2-R03-01A) ST-R05-07