


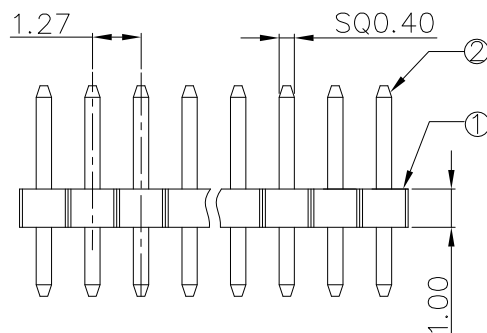


REV.	DESCRIPTION	DATE
A	New Drawing	2022/06/29

$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.30$$

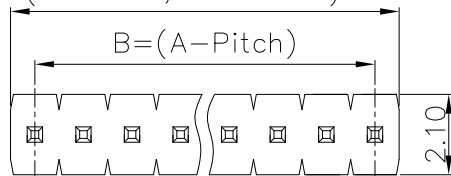

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 500V AC/Min				



P.C.B LAYOUT

PHCS - D S XXX G 1 C B O N G - A XXXX																	
PCB Contact Type		Plastic Base		Number of Contact		Contact Plating		Base		Base Color		Plastic		Packing		Series No	
D Straight		S Single Base		01 to 50 contacts		G1 Gold flash		C		B Black		N NY-6T		G Box			
Type		H x W (mm)															
C		1.0 x 2.1															
														O Without locating Peg			

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	General Tolerance	TITLE	1.27mm Pin Header, Straight Single Row		
A	mm	1:1	X. ± 0.5	DRAWN	DATE	NO.	
			.X ± 0.3	Jacky	06-29-22'	002	
			.XX ± 0.2	CHECK	DATE	PART NO.	
			.XXX ± 0.1	Tom	06-29-22'	PHCS-DSXXXG1CBONG-AXXX	
			角度 ± 5°	APPROVED	DATE	CUSTOMER NO.	
				Tom	06-29-22'		

(Q2-R03-01A) ST-R05-07