

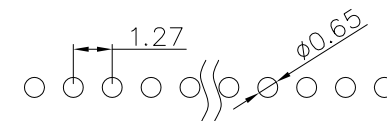
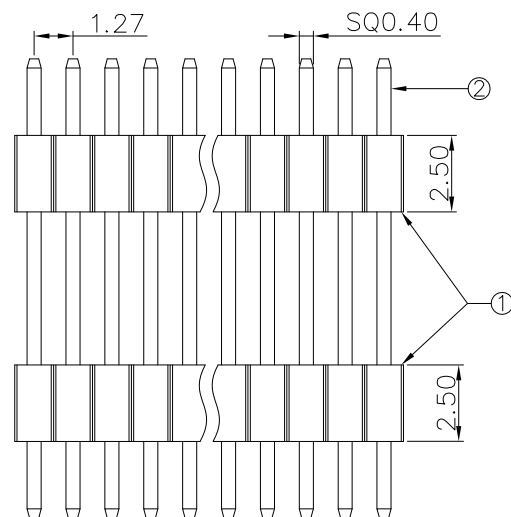


REV.	DESCRIPTION	DATE
A	New Drawing	2022/06/08

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 500V AC/Min				

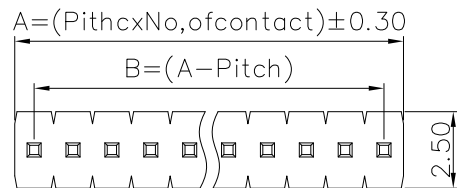

P.C.B LAYOUT

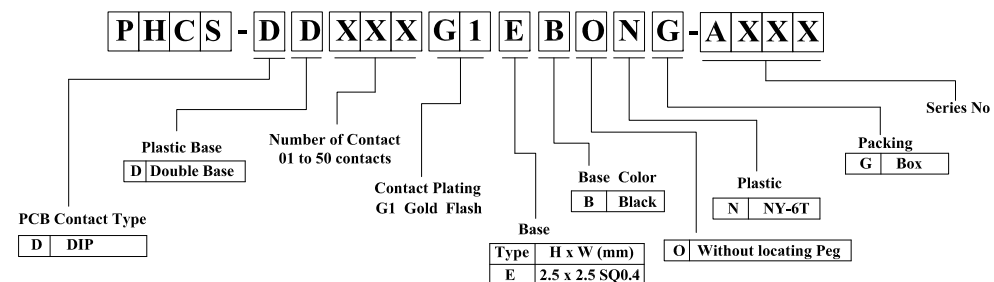

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.				General Tolerance		TITLE	1.27 Pin Header Single Row,Double Plastic DIP Type Base						
				X. ± 0.5		DRAWN Jacky		DATE	NO. 002				
				.X ± 0.3									
				.XX ± 0.2		CHECK Tom		DATE	PART NO. PHCS-DDXXXG1EBONG-AXXX				
				.XXX ± 0.1									
REV.	A	UNIT	mm	SCALE	4:1		角度	± 5°	APPROVED	Tom	DATE	06-08-22'	CUSTOMER NO.

(Q2-R03-01A) ST-R05-07