
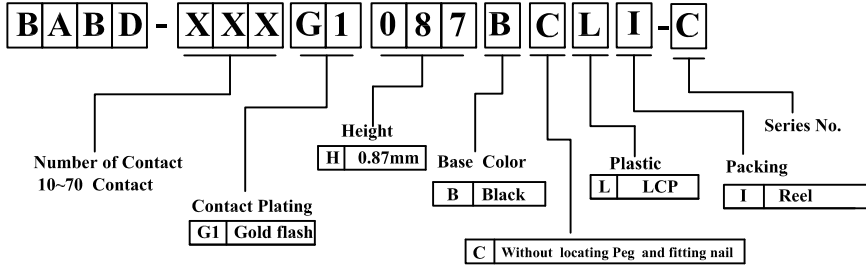
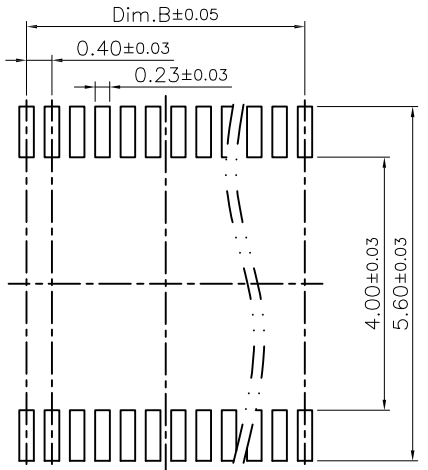

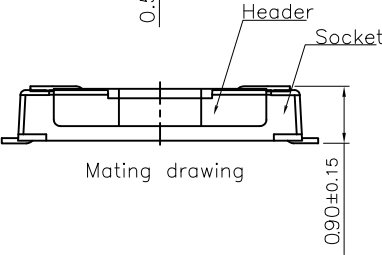

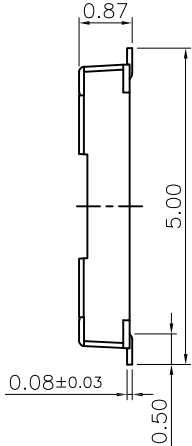


REV.	DESCRIPTION	DATE
A	New Drawing	2022/03/01

Compliance with:
 PCIe4.0(16GTS),
 USB4 V2.0(GEN4)(80Gbps),
 USB4 Gen3(40Gbps),
 USB3.2 Gen2(10Gbps).
 Mating with:
 "BBBD-XXXG1063BCLI-C"

Specifications:
 Current Rating: 0.3A AC,DC
 Voltage Rating: 30V AC,DC
 Contact Resisittance: 80m ohm.Max
 Insulation Resisittance: 1000M ohm.Min
 Withstanding Voltage: 150V AC/Minute
 Operating Temperature Range:-55°C~+85°C

Material:
 Insulator: Temp Plastic(UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Plated: Gold Plated

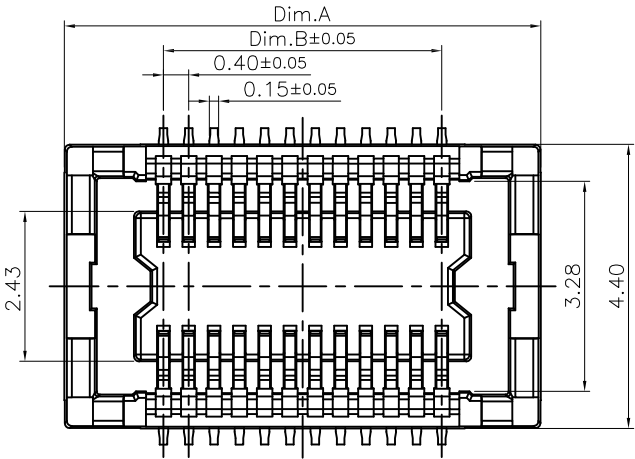

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	4.70	1.60	40	10.70	7.60
20	6.70	3.60	50	12.70	9.60
24	7.50	4.40	60	14.70	11.60
30	8.70	5.60	70	16.70	13.60

RoHS compliant

Superior Tech Co., Ltd.

General Tolerance		TITLE		PH 0.4mm Female BTB MH0.9mm	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Tom		03-01-22'	
.XX ± 0.2		CHECK		NO.	
.XXX ± 0.1		APPROVED		T230	
Angle ± 5°				PART NO.	
				BABD-XXXG1087BCLI-C	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07