
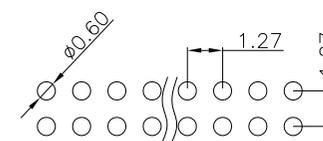
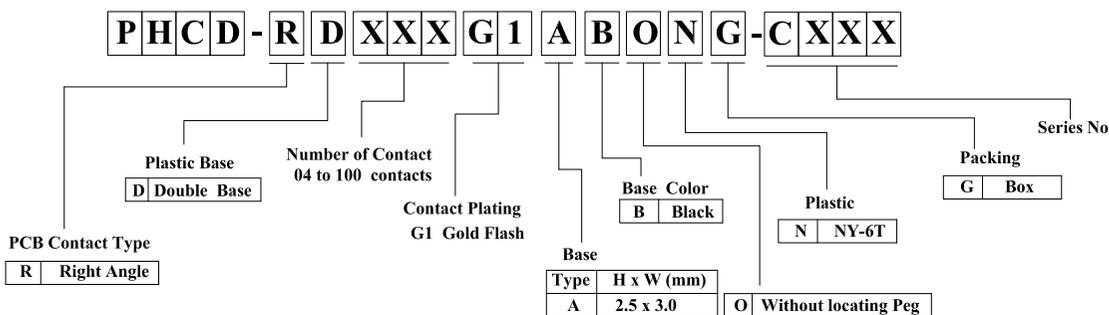
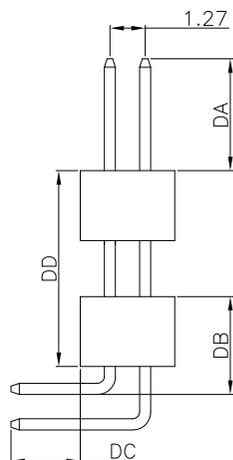
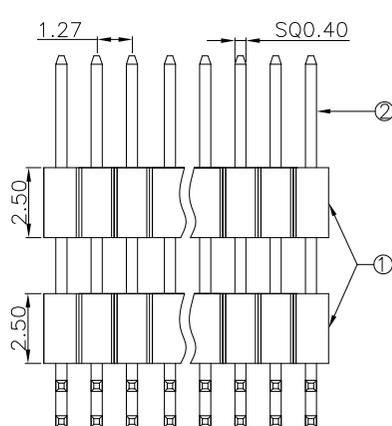


$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.30$$

$$B = (A - \text{Pitch})$$

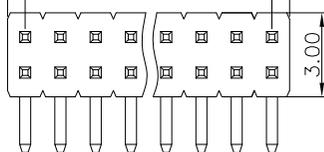

P.C.B LAYOUT

REV.	DESCRIPTION	DATE
A	New Drawing	2013/06/21

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	
X. ± 0.5		1.27x1.27 Pin Header, Right Angle Dual Row	
.X ± 0.3		DRAWN Zhanghonglan	DATE 06-13-13'
.XX ± 0.2		CHECK	NO. 002
.XXX ± 0.1		APPROVED	DATE
角度 ± 5°			PART NO. PHCD-RDXXXG1ABONG-CXXX
			CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1



(Q2-R03-01A) ST-R05-07