

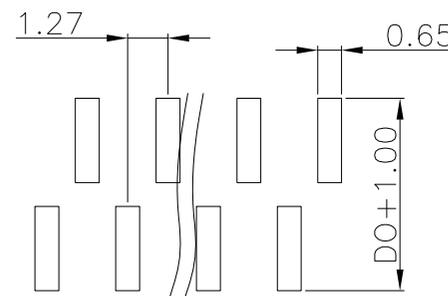

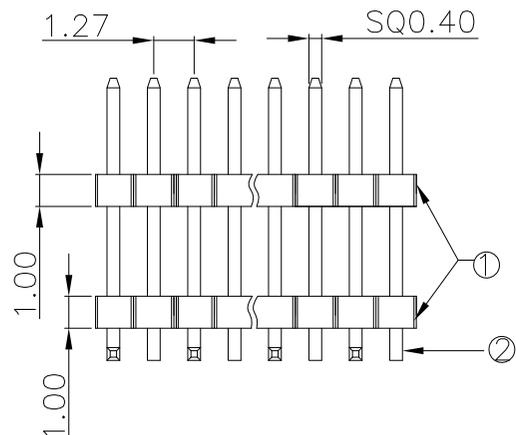


$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.30$$

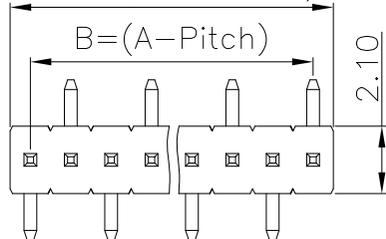

PHCS - A D XXXX G1 C B O N G - B XXXX

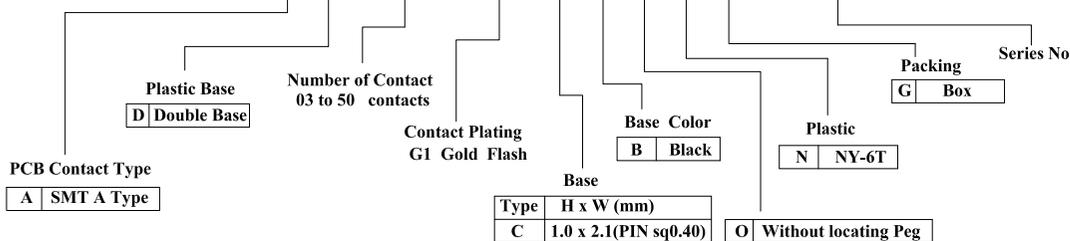

REV.	DESCRIPTION	DATE
A	New Drawing	2014/07/09

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	1.27mm Pin Header , SMT Single Row	
X. ± 0.5		DRAWN Zhanghonglan	DATE	NO.
.X ± 0.3			07-09-14'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1				PHCS-ADXXXXG1CBONG-BXXXX
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1



(Q2-R03-01A) ST-R05-07