

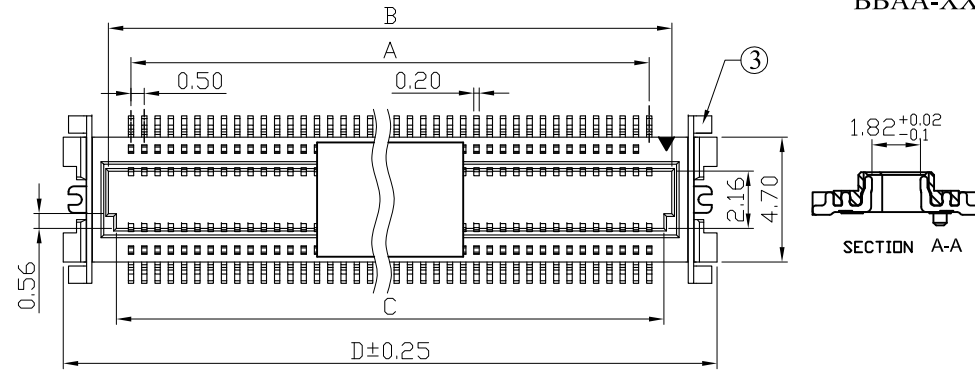


Mating with:
"BBAA-XXXG1205NWLI-B "



SECTION A-A

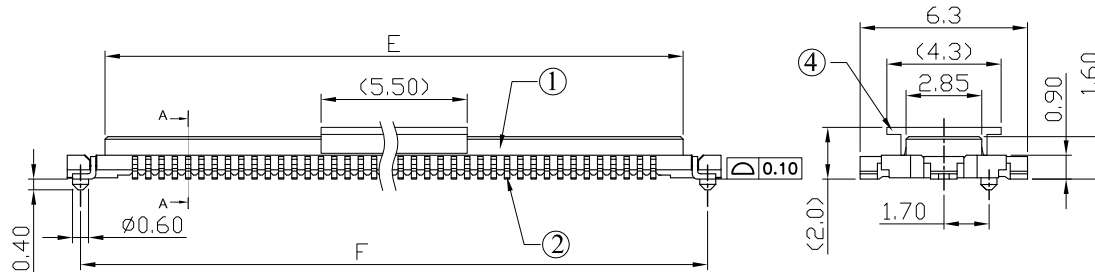

Mating Height Drawing

B A A A - X X X G 1 0 9 0 N W L X - B

Number of Contact
20,30,40,60,80 Contact

Contact Plating
G1 Gold flash

Height
H 0.9mm

Base Color
N Natural

Plastic
L LCP

Series No.

Packing
I Reel
E Reel+Cap


W With locating Peg with fitting nail

REV.	DESCRIPTION	DATE
A	最新料號版	2012/01/13

LTR	Part Name	Material	Description	QTY
1	Housing	LCP NY-46 UL94V-0	+30%GF +40%GF Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max. PEGS:2.54um [100u"] MIN. MATTE-TIN OVER0.75um [30u"] MIN. NICKEL PLATED.	2
4	CAP	LCP	—	1

Temperature Rating : -40°C ~ +105°C .

Dielectric Withstanding Voltage : 300 V AC/Min

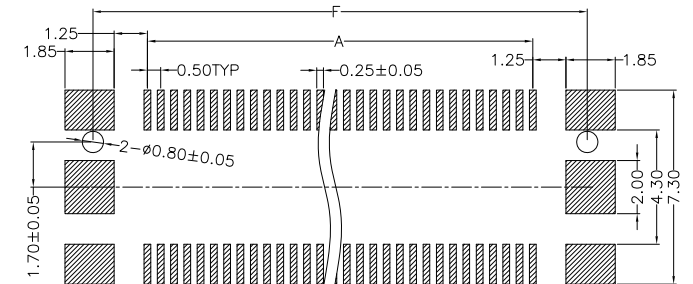

PC BOARD LAYOUT

Circuit No.	Dimensions					
	A	B (A+1.7)	C (A+1.1)	D (A+5.1)	E (A+2.25)	F (A+4.1)
2*10P	4.50	6.20	5.60	9.60	6.75	8.60
2*15P	7.00	8.70	8.10	12.10	9.25	11.10
2*20P	9.50	11.20	10.60	14.60	11.75	13.60
2*30P	14.50	16.20	15.60	19.60	16.75	18.60
2*40P	19.50	21.20	20.60	24.60	21.75	23.60

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5

.X ± 0.3

.XX ± 0.2

.XXX ± 0.1

角度

± 5°

TITLE

DRAWN

CHECK

APPROVED

PH0.5 BTOB H0.9 Female SMT

張紅蘭

DATE

2012/01/13

DATE

DATE

DWG.NO.

002

PART NO.

BAAA-XXXG1090NWLX-B

CUSTOMER NO.

REV.

A

UNIT

mm

SCALE

1:1

