
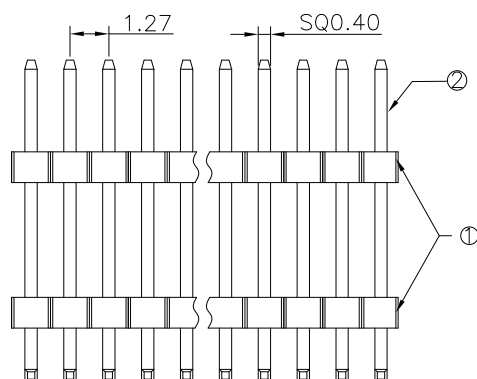
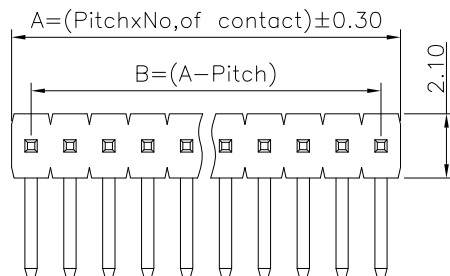


REV.	DESCRIPTION	DATE
A	New Drawing	2013/02/26

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min



P.C.B LAYOUT

P H C S - R D X X X G 1 C B O N G - C X X X	Series No
P H C S	Plastic Base D Duble Base
- R	PCB Contact Type R Right Angle
D	Number of Contact 01 to 50 contacts
X X X	Contact Plating G1 Gold flash
G 1	Base Color B Black
C	Base Type H x W (mm) C 1.0 x 2.1
B	Base Color B Black
O	Without locating Peg
N G	Plastic N NY-6T
- C X X X	Packing G Box

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		1.27 Pin Header Right Angel Single Row	
X. ± 0.5		DRAWN		DATE	NO.
.X ± 0.3		Zhanghonglan		02-26-13'	002
.XX ± 0.2		CHECK		DATE	PART NO.
.XXX ± 0.1		APPROVED		DATE	PHCS-RDXXXG1CBONG-CXXX
角度 ± 5°					CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07