
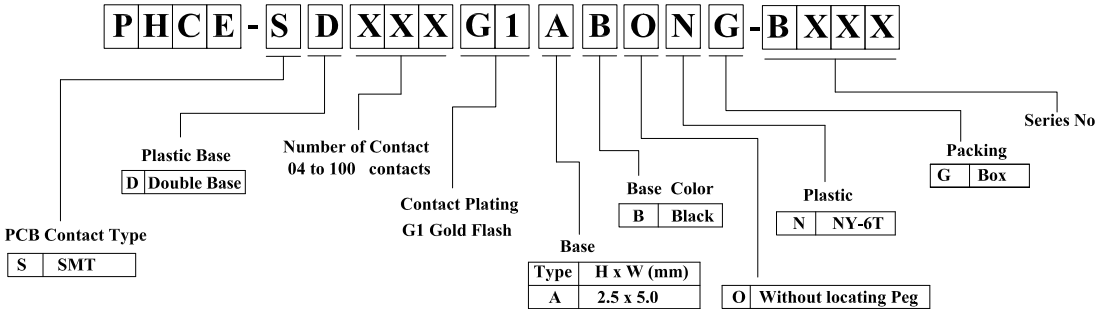
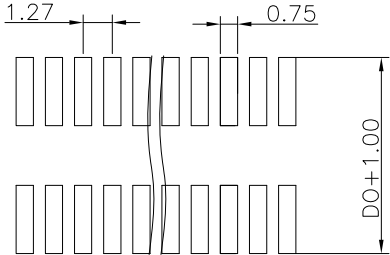
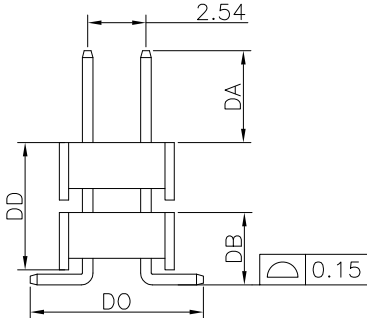
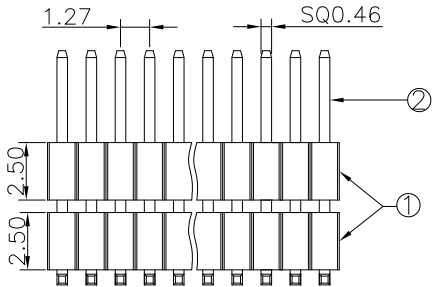


REV.	DESCRIPTION	DATE
A	New Drawing	2008/05/07

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~+125°C . Dielectric Withstanding Voltage : 500V AC/Min				

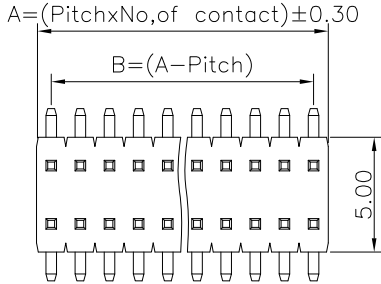

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.			General Tolerance		TITLE 1.27x2.54mm Pin Header SMT Dual Row		
			X. ± 0.5		DRAWN ZhaoXiaoLin		DATE 05-07-08'
			.X ± 0.3		CHECK XiaoPing		DATE 05-07-08'
			.XX ± 0.2		APPROVED Jhen-fa		DATE 05-07-08'
			.XXX ± 0.1		PART NO. PHCE-SDXXXG1ABONG-BXXX		
REV.	UNIT	SCALE			CUSTOMER NO.		
A	mm	1:1					