
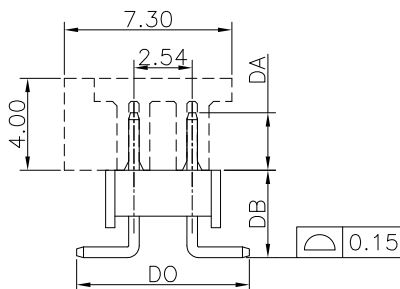
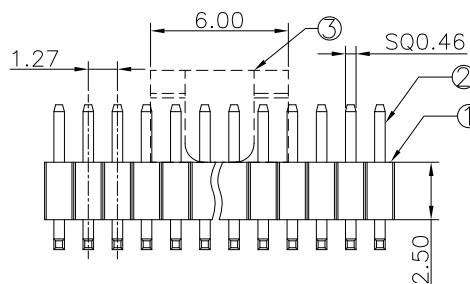


REV.	DESCRIPTION	DATE
A	New Drawing	2021/06/02


$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.30$$

$$B = (A - \text{Pitch})$$

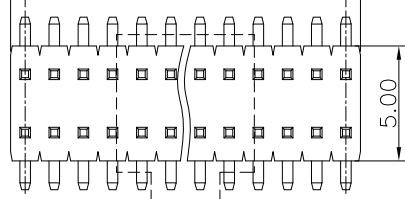

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.5A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon UL94V-0	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

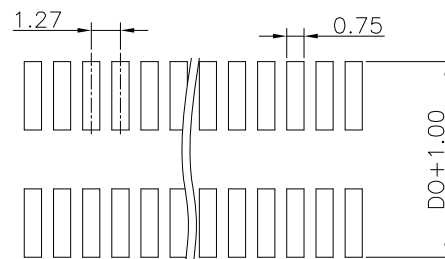

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE	1.27x2.54mm Pin Header SMT Dual Row	
X. ± 0.5		DRAWN Jacky	DATE	NO.
.X ± 0.3			06-02-21'	002
.XX ± 0.2		CHECK Tom	DATE	PART NO.
.XXX ± 0.1			06-02-21'	PHCE-SSXXXG1ABONE-BXXX
角度	± 5°	APPROVED Joe	DATE	CUSTOMER NO.
			06-02-21'	

(Q2-R03-01A) ST-R05-07