

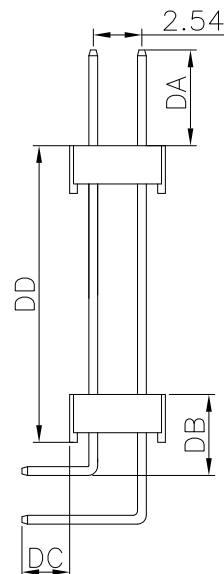
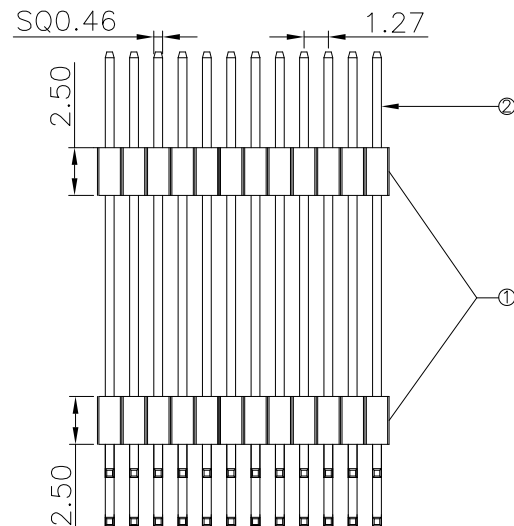


$$A = (\text{Pitch} \times \text{No. of contact}) \pm 0.30$$

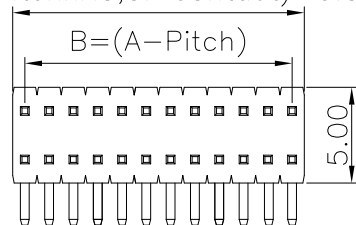


PHCE - R D XXX G1 A B O N G - C XXX

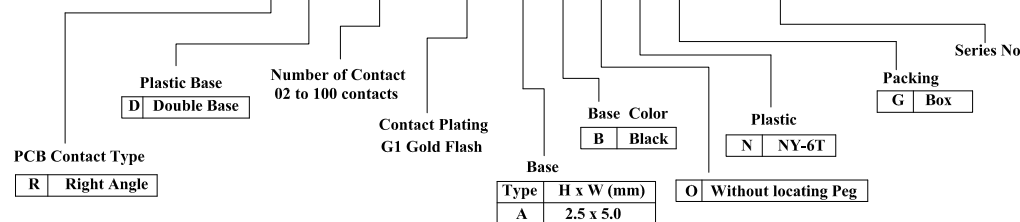

REV.	DESCRIPTION	DATE
A	New Drawing	2008/07/31

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 500V AC/Min				

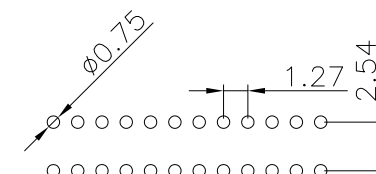

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance				TITLE			1.27x2.54mm Pin Header Dual Row Right Angle	
X. ± 0.5				DRAWN		DATE	NO.	
.X ± 0.3				ZhaoXiaoLin		07-31-08'	002	
.XX ± 0.2				CHECK		DATE	PART NO.	
.XXX ± 0.1				APPROVED		DATE	PHCE-RDXXXG1ABONG-CXXX	
角度 ± 5°							CUSTOMER NO.	

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07