
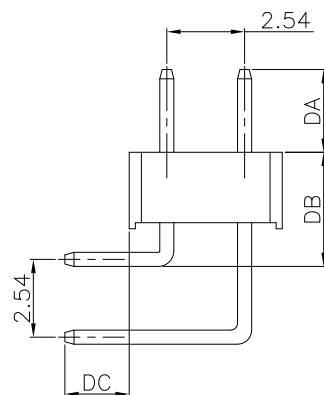
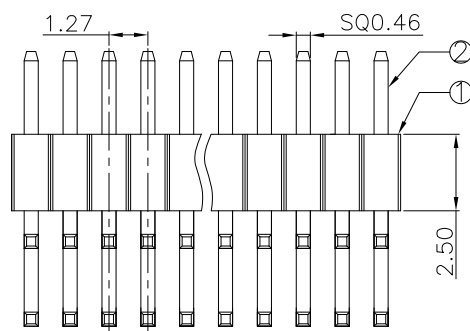
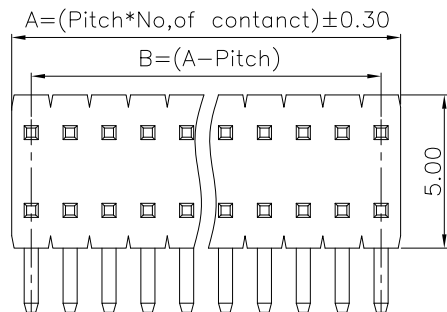


P.C.B LAYOUT

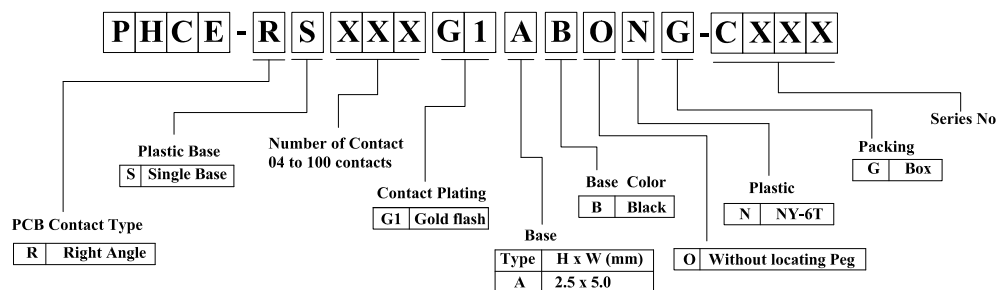

REV.	DESCRIPTION	DATE
A	New Drawing	2015/03/31

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 1.5A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 500V AC/Min				

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE	1.27x2.54mm Pin Header Dual Row Right Angle	
X. ± 0.5		DRAWN Zhanghonglan	DATE	NO.
.X ± 0.3			03-31-15'	002
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	PHCE-RSXXXG1ABONG-CXXX
角度	± 5°			CUSTOMER NO.

(Q2-R03-01A) ST-R05-07