



Mating with:
"BBAA-XXXG1355NWL1-B"



8.10Pin只能貼Mylar



Mating Height Drawing



SECTION A-A

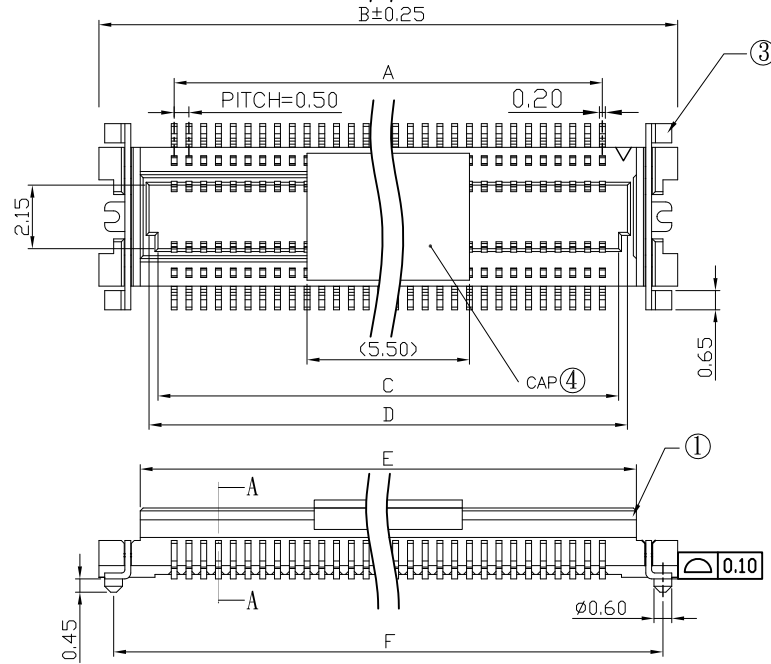

BAAA-XXXG1140NWLX-B

Number of Contact
08,10,40,60 Contact

Contact Plating
G1 Gold flash

Height
H 1.4mm

Base Color
N Natural

Plastic
L LCP

Series No.

Packing
I Reel
E Reel+Cap
F Reel+Mylar

W With locating Peg with fitting nail


8.10Pin空間太小
只能貼Mylar

REV.	DESCRIPTION	DATE
A	最新料號版	2012/01/13
B	增加輔料選項	2021/05/31

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	CAP Mylar	LCP PI	260°C for 10 Seconds. 250°C for 10 Seconds.	1

Temperature Rating : -40°C ~ +105°C .

Dielectric Withstanding Voltage : 300 V AC/Min

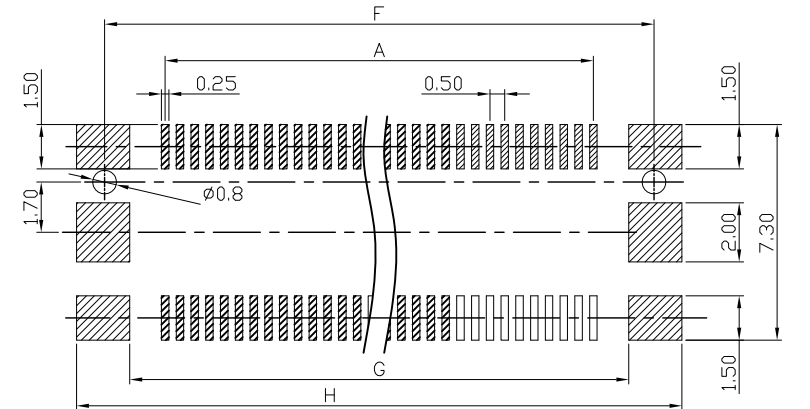

Circuit No.	Dimensions							
	A	B (A+5.1)	C (A+1.1)	D (A+1.7)	E (A+2.3)	F (A+4.1)	G (A+2.4)	H (A+6.0)
2*4P	1.50	6.60	2.60	3.20	3.80	5.60	3.90	7.50
2*5P	2.00	7.10	3.10	3.70	4.30	6.10	4.40	8.00
2*20P	9.50	14.60	10.60	11.20	11.80	13.60	11.90	15.50
2*30P	14.50	19.60	15.60	16.20	16.80	18.60	16.90	20.50

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5

.X ± 0.3

.XX ± 0.2

.XXX ± 0.1

角度

± 5°

TITLE PH0.5 BTOB H1.4 母座成品

DRAWN

Tom

DATE

2021/05/31

DWG.NO.

002

CHECK

DATE

PART NO.

BAAA-XXXG1140NWLX-B

APPROVED

DATE

CUSTOMER NO.

REV.

B

UNIT

mm

SCALE

1:1

