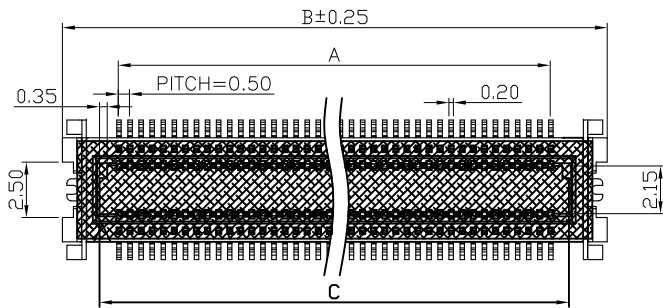


B A A A - X X X G 1 3 4 0 N W L X - B

Number of Contact
20,30,80 Contact

Contact Plating
G1 Gold Flash

Height
H 3.4mm




Base Color
N Natural

Plastic
L LCP

Packing
I Reel
F Reel+Mylar

W With locating Peg with fitting nail

Mating with:
"BBAA-XXXG1155NWLX-B"




Mating Height Drawing

REV.	DESCRIPTION	DATE
A	最新版	2012/01/16
B	增加视图	2016/09/21

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	Mylar	PI	—	1

Temperature Rating : -40°C ~ +105°C.
Dielectric Withstanding Voltage : 300 V AC/Min

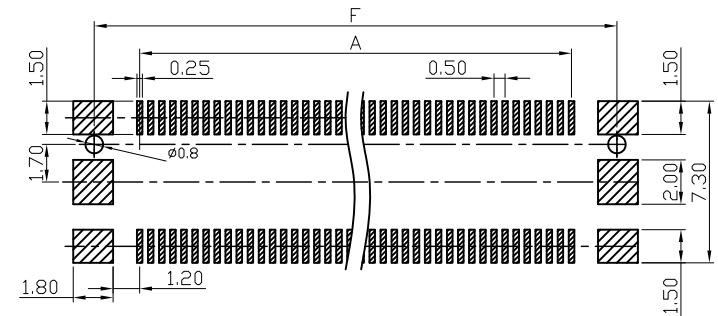

PC BOARD LAYOUT

RoHS compliant

Circuit No.	Dimensions					
	A	B (A+5.1)	C (A+1.7)	D (A+2.9)	E (A+2.3)	F (A+4.1)
2*10P	4.50	9.60	6.20	7.40	6.80	8.60
2*15P	7.00	12.10	8.70	9.90	9.30	11.10
2*40P	19.50	24.60	21.20	22.40	21.80	23.60

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5

.X ± 0.3

.XX ± 0.2

.XXX ± 0.1

角度

± 5°

TITLE BTOB PH0.5 H3.4 LCP料 斷差型母座成品圖

DRAWN

Tom

DATE

09-21-16'

DWG.NO.

002

CHECK

DATE

PART NO.

BAAA-XXXG1340NWLX-B

APPROVED

DATE

CUSTOMER NO.

REV.

B

UNIT

mm

SCALE

1:1

