


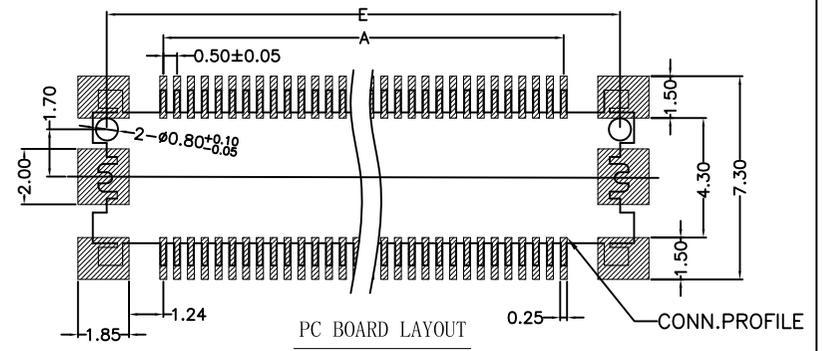



Compliance with:
PCIe4.0(16GTS).
Mating with:
"BAAA-XXXG1090XWLX-B"



SEC: A-A

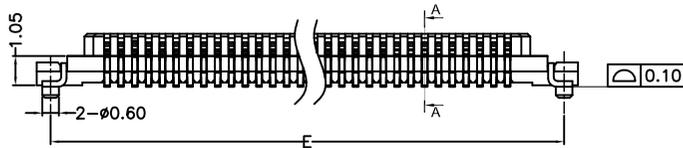

BBAA - XXXG1110XWLI - B

Number of Contact: 20,30,40,60 Contact
 Contact Plating: GI Gold flash
 Height: H 1.1mm
 Base Color: B Black, N Natural
 Plastic: L LCP
 Series No.: I Reel
 W With locating Peg with fitting nail

REV.	DESCRIPTION	DATE
A	最新版	2012/01/16
B	变更GAP尺寸	2016/09/19

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max. PEGS:2.54um [100u"] MIN. MATTE-TIN OVER0.75um [30u"] MIN. NICKEL PLATED.	2

Temperature Rating : -40°C ~ +105°C .
 Dielectric Withstanding Voltage : 300 V AC/Min

Circuit No.	Dimensions				
	A	B (A+2.3)	C (A+1.65)	D (A+5.1)	E (A+4.1)
2*10P	4.50	6.80	6.15	9.60	8.60
2*15P	7.00	9.30	8.65	12.10	11.10
2*20P	9.50	11.80	11.15	14.60	13.60
2*30P	14.50	16.80	16.15	19.60	18.60

Superior Tech Co., Ltd.

General Tolerance		TITLE PH0.5 H1.1 BTOB 公座成品		
X. ± 0.5	DRAWN	DATE	DWG.NO.	
.X ± 0.3	Tom	2016/09/19	002	
.XX ± 0.2	CHECK	DATE	PART NO.	
.XXX ± 0.1	APPROVED	DATE	BBA-XXXG1110XWLI-B	
角度 ± 5°			CUSTOMER NO.	

REV. B	UNIT mm	SCALE 1:1	
--------	---------	-----------	--