

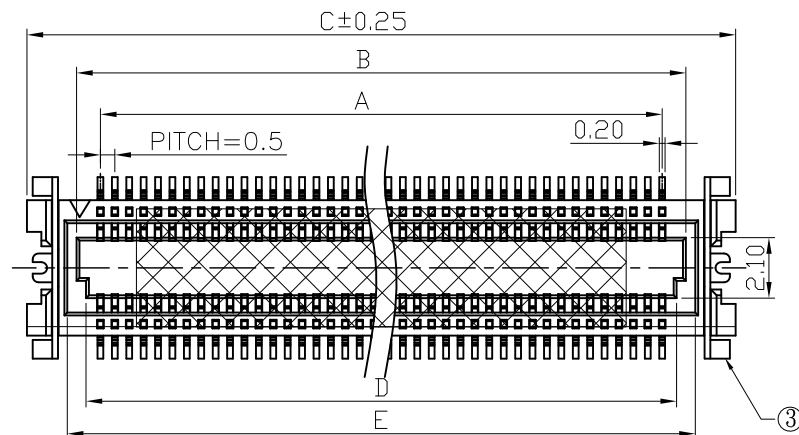

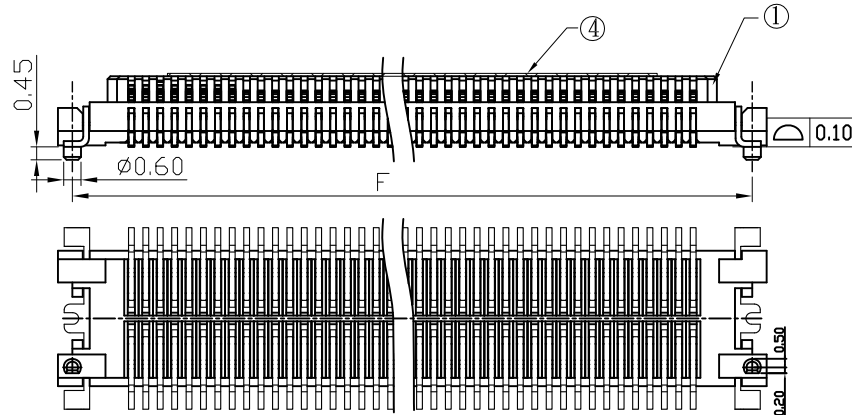




Mating with:
"BAAA-XXXG1340NWLX-B"



Mating Height Drawing

B B A A - X X X G 1 1 5 5 N W L X - B

Number of Contact
08,10,20,60,80 Contact

Contact Plating
G1 Gold flash

Height
H 1.55mm

Base Color
N Natural

Plastic
L LCP

Packing
I Reel
F Mylar+Reel


W With locating Peg with fitting nail

REV.	DESCRIPTION	DATE
A	最新料號版	2012/01/13
B	增加视图	2016/09/21

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	Mylar	PI	_____	1

Temperature Rating : -40°C ~ +105°C .

Dielectric Withstanding Voltage : 300 V AC/Min

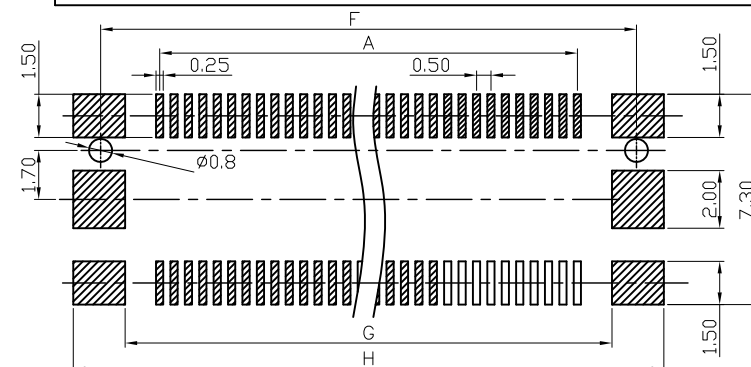

Circuit No.	Dimensions							
	A	B (A+1.65)	C (A+5.1)	D (A+1.0)	E (A+2.3)	F (A+4.1)	G (A+2.4)	H (A+6.0)
2*4P	1.50	3.15	6.60	2.50	3.80	5.60	3.90	7.50
2*5P	2.00	3.65	7.10	3.00	4.30	6.10	4.40	8.00
2*10P	4.50	6.15	9.60	5.50	6.80	8.60	6.90	10.50
2*30P	14.50	16.15	19.60	15.50	16.80	18.60	16.90	20.50
2*40P	19.50	21.15	24.60	20.50	21.80	23.60	21.90	25.50

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5

.X ± 0.3

.XX ± 0.2

.XXX ± 0.1

角度 ± 5°

TITLE PH0.5 BTOB H1.55 公座成品

DRAWN

Tom

DATE

2016/09/21

DWG.NO.

002

CHECK

DATE

PART NO.

BBA-XXXG1155NWLX-B

APPROVED

DATE

CUSTOMER NO.

REV.

B

UNIT

mm

SCALE

1:1

