





REV.	DESCRIPTION	DATE
A	最新版	2012/01/16
B	增加70pin.需擴Pin	2019/10/28


Mating with:
"BAAA-XXXG1090NWLX-B"

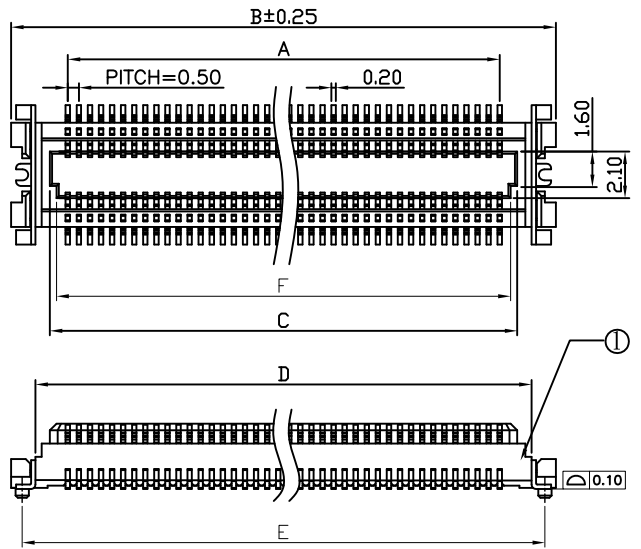


Mating Height Drawing

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 300 V AC/Min

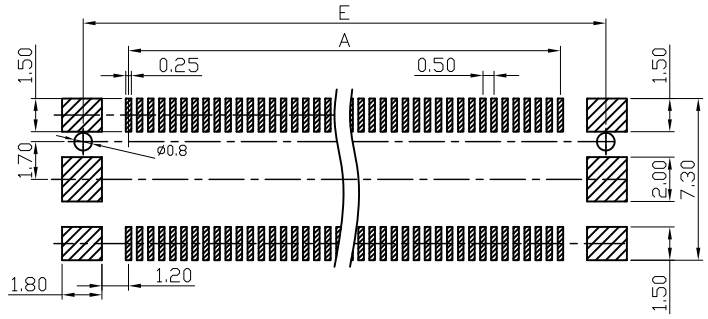

PC BOARD LAYOUT

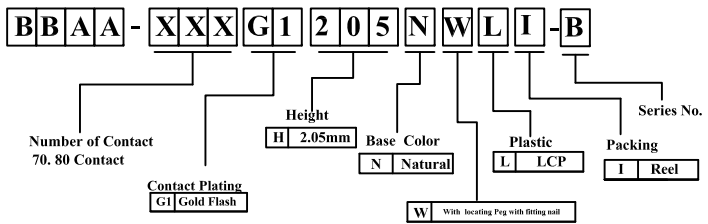

Circuit No.	Dimensions					
	A	B (A+5.1)	C (A+1.6)	D (A+2.9)	E (A+4.1)	F (A+1.0)
2*35P	17.00	22.10	18.60	19.90	21.10	18.00
2*40P	19.50	24.60	21.10	22.40	23.60	20.50

需擴PIN →

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE BTOB PH0.5 H2.05 LCP料 斷差型公座成品圖		
X. ± 0.5	DRAWN Tom	DATE 2019/10/28	DWG.NO. 002
.X ± 0.3	CHECK	DATE	PART NO. BBAA-XXXG1205NWL I - B
.XX ± 0.2	APPROVED	DATE	CUSTOMER NO.
.XXX ± 0.1	角度 ± 5°		

REV. B	UNIT mm	SCALE 1:1	
--------	---------	-----------	--