
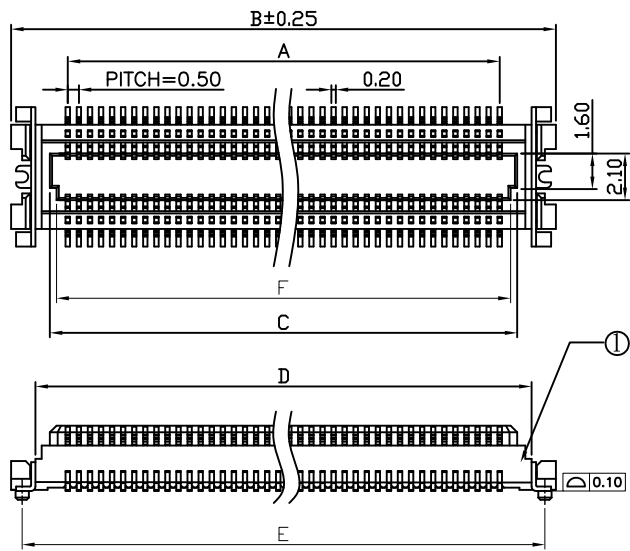





Mating with:
"BAAA-XXXG1340NWLX-B"



REV.	DESCRIPTION	DATE
A	最新版	2012/01/16
B	增加70pin.需擴Pin	2019/10/28

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 300 V AC/Min

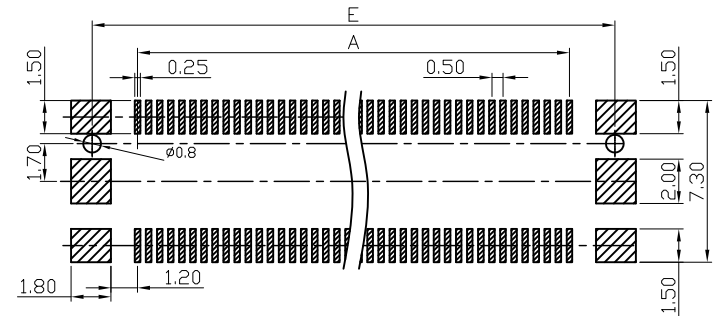

PC BOARD LAYOUT

Circuit No.	Dimensions					
	A	B <A+5.1>	C <A+1.6>	D <A+2.9>	E <A+4.1>	F <A+1.0>
2*35P	17.00	22.10	18.60	19.90	21.10	18.00
2*40P	19.50	24.60	21.10	22.40	23.60	20.50

需擴PIN

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
B	mm	1:1	

General Tolerance		TITLE BTOB PH0.5 H2.05 LCP料 斷差型公座成品圖	
X. ± 0.5		DRAWN	DATE
.X ± 0.3		Tom	2019/10/28
.XX ± 0.2		CHECK	DATE
.XXX ± 0.1		APPROVED	DATE
角度 ± 5°		DWG.NO. 002	
		PART NO. BBAA-XXXG1205NWLI-B	
		CUSTOMER NO.	