
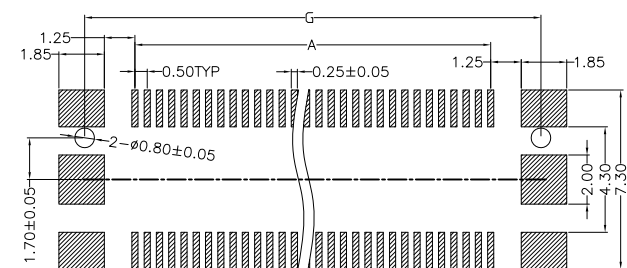

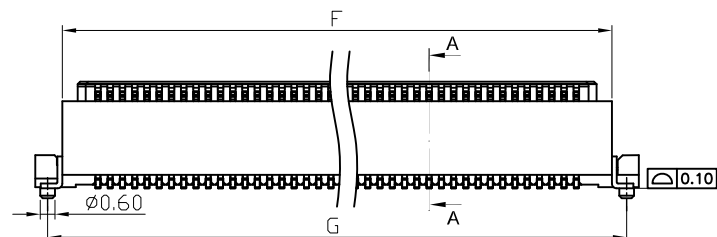



REV.	DESCRIPTION	DATE
A	New Drawing	2012/01/16

Mating with:
"BAAA-XXXG1140NWLX-B"

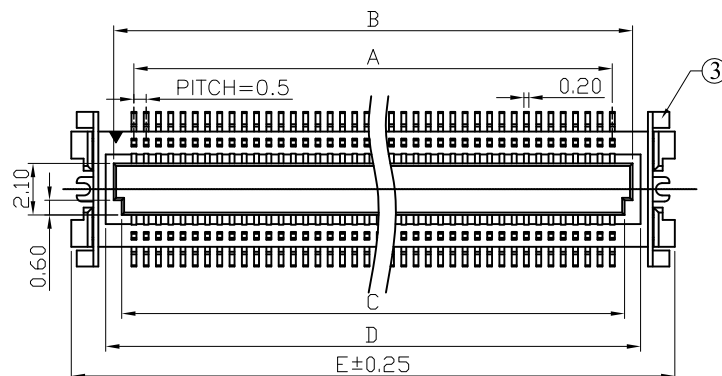

B	B	A	A	-	X	X	X	G	1	3	5	5	N	W	L	I	-	B
Number of Contact 20,30,40,60,80 Contact					Height H 3.55mm			Base Color N Natural				Plastic L LCP		Packing I Reel		Series No.		
				Contact Plating G1 Gold flash									W With locating Peg with fitting nail					

LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
Temperature Rating : -40°C ~ +105°C . Dielectric Withstanding Voltage : 300 V AC/Min				

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE PH0.5 BTOB H3.55 公座 SMT		
X. ± 0.5		DRAWN 廖 宇	DATE 01-16-12'	DWG.NO. 002
.X ± 0.3				
.XX ± 0.2		CHECK	DATE	PART NO. BBAA-XXXG1355NWLI-B
.XXX ± 0.1				
角度	± 5°	APPROVED	DATE	CUSTOMER NO.