

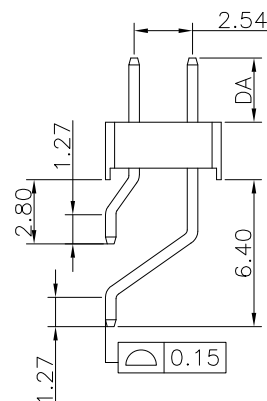
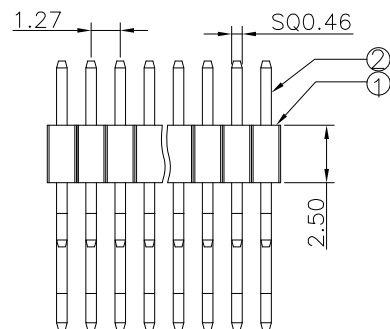



| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | New Drawing | 2014/11/05 |



| LTR                                                                                    | Part Name | Material         | Description                                                                        | QTY |
|----------------------------------------------------------------------------------------|-----------|------------------|------------------------------------------------------------------------------------|-----|
| 1                                                                                      | Housing   | Nylon<br>UL94V-0 | 260°C for 10 Seconds .<br>Initial : 1000M Ohms Min.<br>After Test : 500M Ohms Min. | 1   |
| 2                                                                                      | Contact   | Brass            | Current Rating : 1.0A<br>Initial : 20m Ohms Max.<br>After Test : 40m Ohms Max.     | XXX |
| Temperature Rating : -40°C ~ +125°C .<br>Dielectric Withstanding Voltage : 500V AC/Min |           |                  |                                                                                    |     |



P.C.B LAYOUT

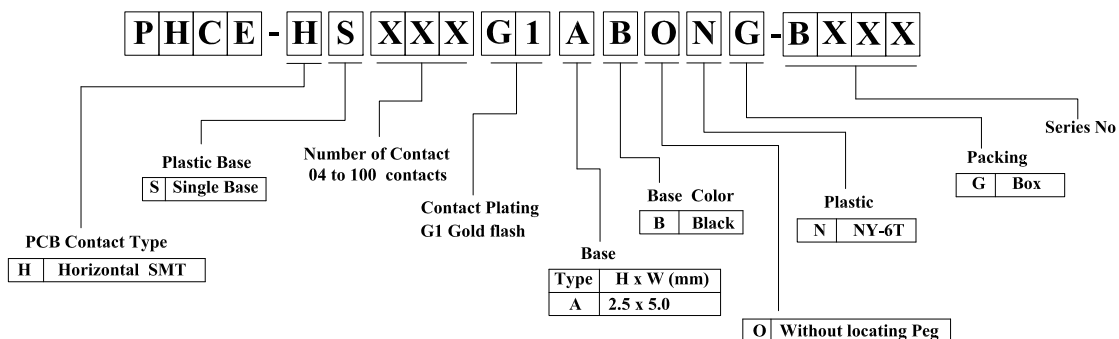

RoHS compliant

|                                                          |      |       |                                                                                     |                   |      |                        |                                                |              |
|----------------------------------------------------------|------|-------|-------------------------------------------------------------------------------------|-------------------|------|------------------------|------------------------------------------------|--------------|
| <div>竣豪電子股份有限公司</div> <div>Superior Tech Co., Ltd.</div> |      |       |                                                                                     | General Tolerance |      | TITLE                  | 1.27x2.54mm Pin Header,Horizontal SMT Dual Row |              |
|                                                          |      |       |                                                                                     | X. ± 0.5          |      | DRAWN                  | DATE                                           | NO.          |
|                                                          |      |       |                                                                                     | .X ± 0.3          |      | 尹素平                    | 11-05-14'                                      | 002          |
|                                                          |      |       |                                                                                     | .XX ± 0.2         |      | CHECK                  | DATE                                           | PART NO.     |
|                                                          |      |       |                                                                                     | .XXX ± 0.1        |      | PHCE-HSXXXG1ABONG-BXXX |                                                |              |
| REV.                                                     | UNIT | SCALE |  | 角度                | ± 5° | APPROVED               | DATE                                           | CUSTOMER NO. |
| A                                                        | mm   | 3:1   |                                                                                     |                   |      |                        |                                                |              |

(Q2-R03-01A) ST-R05-07