
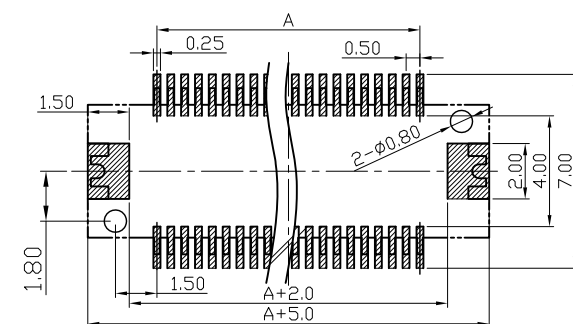


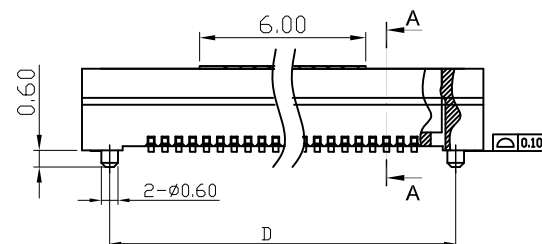



REV.	DESCRIPTION	DATE
A	NEW DRAWING	2014/02/24
B	增加電鍍選向	2019/01/10

Mating with:
"BBAB-XXXG1095NDLI-B "

LTR	Part Name	Material	Description	QTY
1	Housing	LCP +30%玻纖 UL94V-0	260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	Mylar	PI		1

Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 300 V AC/Min

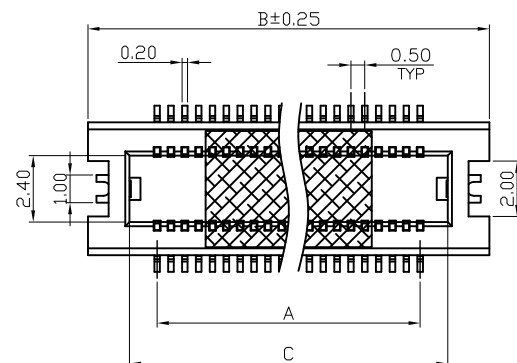

■ : SOLDER AREA
TOLERANCE: ±0.05,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

BAAB	-	XXX	G1	300	N	WL	X	-	B
Number of Contact 30,40,50,80 Contact		Contact Plating G1 Gold flash		Height H 3.0mm	Base Color N Natural	Plastic L LCP	Series No.		
							Packing I Reel F Reel+Mylar		
							With locating Peg with fitting nail		

Circuit No.	Dimensions			
	A	B (A+5.0)	C (A+2.0)	D (A+3.0)
2*15P	7.00	12.00	9.00	10.00
2*20P	9.50	14.50	11.50	12.50
2*25P	12.00	17.00	14.00	15.00
2*40P	19.50	24.50	21.50	22.50

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
B	mm	1:1	

General Tolerance	TITLE	PH0.5 BTOB H3.0母座成品
X. ± 0.5	DRAWN	DATE
.X ± 0.2	Tom	2019/01/10
.XX ± 0.10	CHECK	DATE
.XXX ± 0.05	APPROVED	DATE
角度 ± 5°		
	DWG.NO.	002
	PART NO.	BAAB-XXXG1300NWLX-B
	CUSTOMER NO.	