


P.C.B LAYOUT

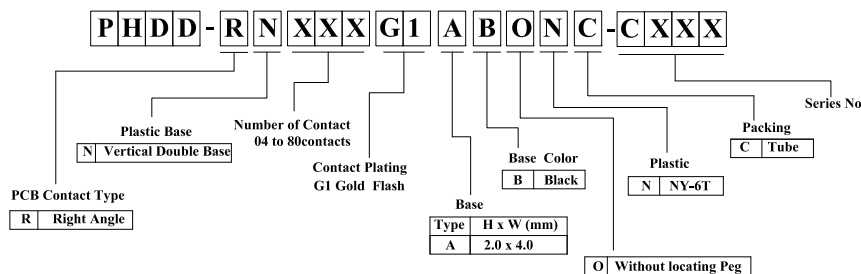

REV.	DESCRIPTION	DATE
A	New Drawing	2019/04/24

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Temperature Rating : -40°C ~ +125°C .
 Dielectric Withstanding Voltage : 500V AC/Min

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		Pitch 2.0x2.0mm Pin Header ,Right Angle Dual Row	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Tom		NO.	
.XX ± 0.2		CHECK		04-24-19'	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°				PART NO.	
				PHDD-RNXXXG1ABONC-CXXX	
				CUSTOMER NO.	

REV.	UNIT	SCALE
A	mm	1:1

