


REV.	DESCRIPTION	DATE
A	New Drawing	2011/01/06

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX


Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min



P.C.B LAYOUT

RoHS compliant

PHDS - R D XXX G1 A B O N X - B XXX

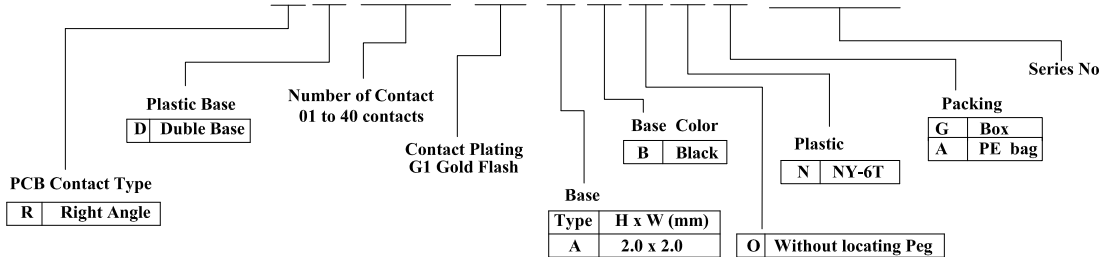

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	Pitch 2.0mm Pin Header ,Right Angle	
X. ± 0.5	DRAWN Zhanghonglan	DATE	NO.
.X ± 0.3		01-06-11'	002
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	PHDS-RDXXXG1ABONX-BXXX
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1

