
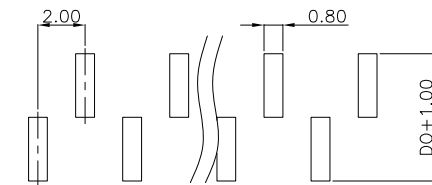
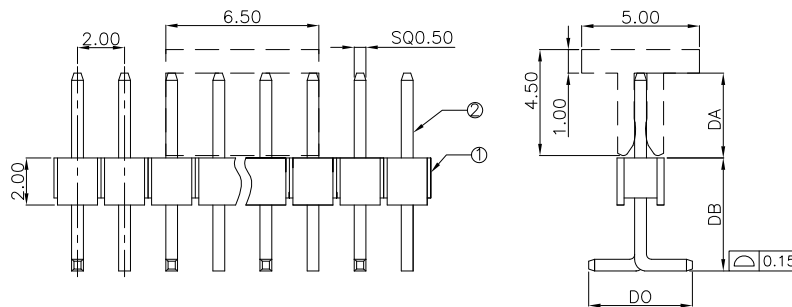



REV.	DESCRIPTION	DATE
A	New Drawing	2023/02/22

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

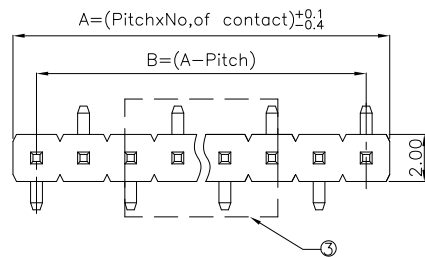

P.C.B LAYOUT

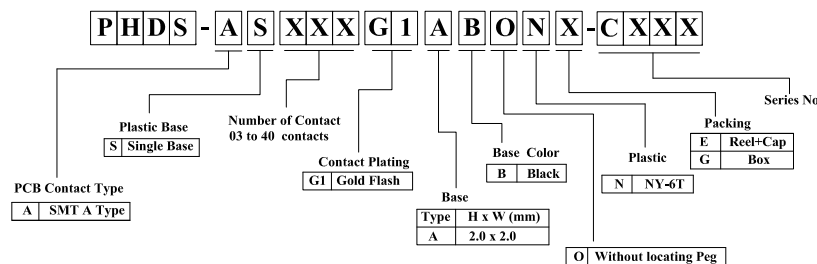

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	2.0mm Pin Header Single Row SMT Type	
X.	± 0.5	DRAWN Tom	DATE	NO.
.X	± 0.3		02-22-23'	002
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1			PHDS-ASXXXG1ABONX-CXXX
角度	± 5°	APPROVED	DATE	CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	