



$$A = (\text{Pitch} \times \text{No. of contact})^{+0.1}_{-0.4}$$

$$B = (A - \text{Pitch})$$

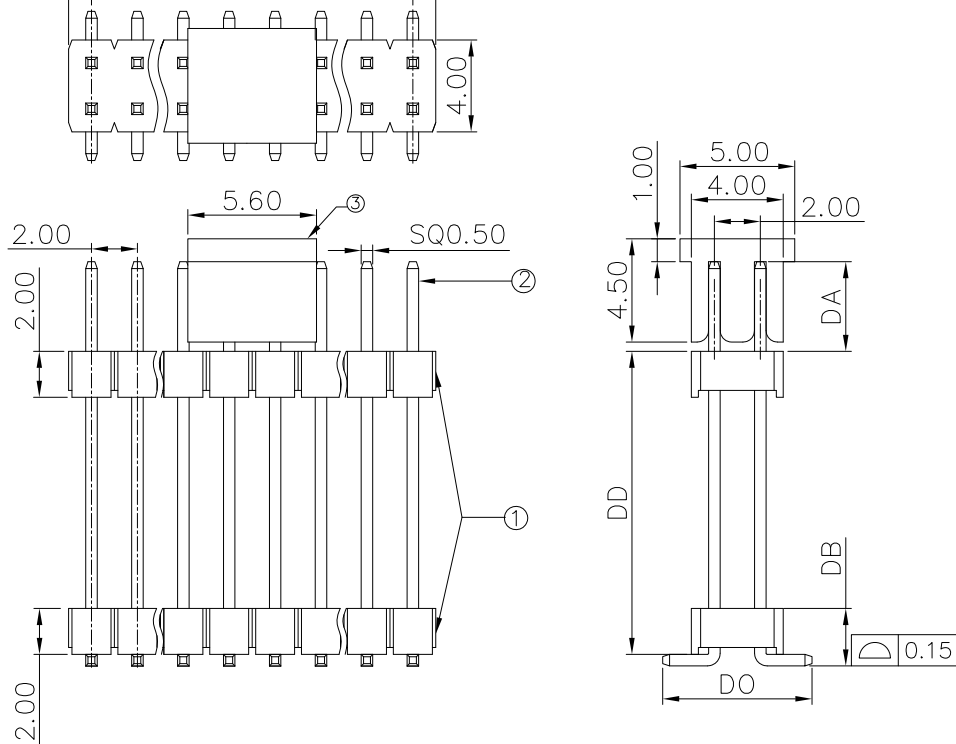


PHDD - S D XXX G 1 A B O N X - B XXXX

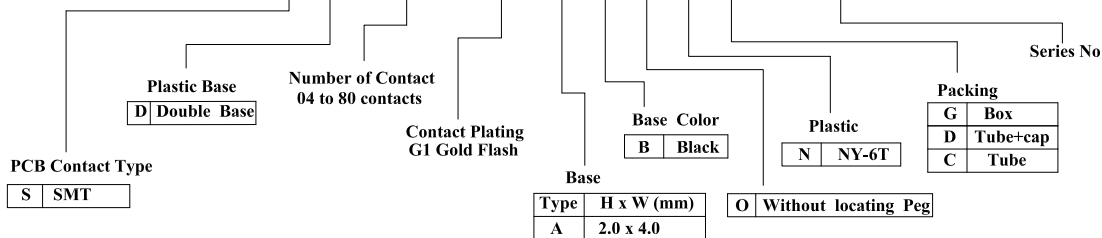

REV.	DESCRIPTION	DATE
A	New Drawing	2021/08/10

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	2
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	cap	Nylon UL94V-0	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

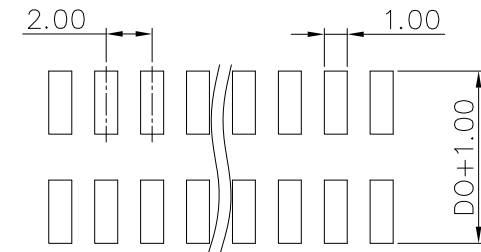

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	2.0x2.0mm Pin Header ,SMT Dual Row	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Jacky	08-16-21'	002
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	Tom	08-16-21'	PHDD-SDXXXG1ABONX-BXXX
角度	± 5°	APPROVED	DATE	CUSTOMER NO.
		Joe	08-16-21'	

REV.	UNIT	SCALE	
B	mm	1:1	