


REV.	DESCRIPTION	DATE
A	New Drawing	2022/04/06

LTR	Part Name	Material	Description	QTY
1	Housing	Nylon UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass	Current Rating : 2.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
3	Cap	Nylon UL94V-0	260°C for 10 Seconds .	1

Temperature Rating : -40°C ~ +125°C .
Dielectric Withstanding Voltage : 500V AC/Min

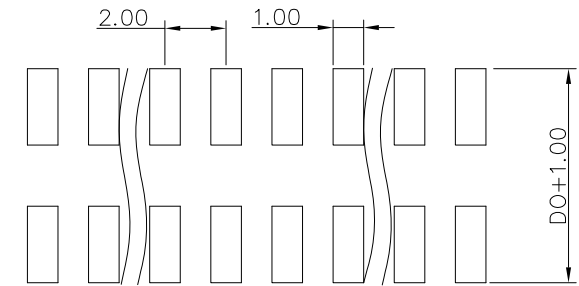

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		2.0x2.0mm Pin Header ,SMT Dual Row	
X. ± 0.5		DRAWN	DATE	NO.	
.X ± 0.3		Jacky	04-06-22'	002	
.XX ± 0.2		CHECK	DATE	PART NO.	
.XXX ± 0.1		Tom	04-06-22'	PHDD-SSXXXG1BBONX-BXXX	
角度	± 5°	APPROVED	DATE	CUSTOMER NO.	
		Tom	04-06-22'		

REV.	UNIT	SCALE	
A	mm	1:1	

(Q2-R03-01A) ST-R05-07